Project Type Date

ALTAIR - Floodlight - Line Voltage Driver - LED High-Power - Aluminum - Yoke Mount - Top Shield

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

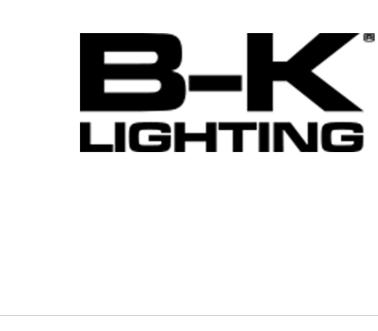

120V, 120-277V

CCT CRI ▼

Delivered

THD

(%)

Factor

Lumens (Lm)



Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

Light	Source

Input voltage:

Technical

LIGHT SOURCE -OPTIC -

Clear Filters

Source

Input Light CRI Power Optic

(W)

Drivers

INPUT POWER (W) -

CONTROL -

Control

(W)

Clear Filters Input Power Input Power

Voltage

MAX LOAD (W) -

Input Voltage

CONTROL -

Clear Filters

Transformer

Control Max Load (W)

Options

Accesory

Mountings

Finishes

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Updated 05/28/2024