

ARTI STAR - Floodlight - Line Voltage Driver - LED COB - Aluminum - Anchor Base - Cap A - Height: 12"



Technical

Control: Non Dimming, ELV Dimming (For use with Electronic Low Voltage Dimmer), INC Dimming (For use with Incandescent Dimmer), 0-10V

Lens: Clear (Standard), Soft Focus, Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Input voltage: 120-277V, 120V

Light Source

Clear Filters

| Light Source | Optic | CCT (K) | CRI | Input Power (W) | Delivered Lumens (Lm) | CBCP | MacAdam Ellipses (SDCM) | Operating Current (mA) | L70 (Hours) | L90B10 (Hours) | IES File | Diagram CONE |
|--------------|----------------|---------|------------------|-----------------|-----------------------|------|-------------------------|------------------------|-------------|----------------|----------|--------------|
| | Flood (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Spot (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Wide Flood (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Flood (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Spot (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Wide Flood (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Flood (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Spot (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| | Wide Flood (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |

Drivers

Clear Filters

| Control | Input Power (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | InRush Current | Output Current | Output Power (Max-W) | Output Voltage (Range) | Dimming (Range) |
|---------|-----------------|---------------|--------------|---------|-------------------------------|----------------|----------------|----------------------|------------------------|-----------------|
| | | | | | | | | | | |


Transformer

Clear Filters

| Control | Max Load (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | Output Current | Circuit Breaker | Min Load (W) |
|----------|--------------|---------------|--------------|---------|-------------------------------|----------------|-----------------|--------------|
| NON | 20 | | | | | | | |
| NON | 10 | | | | | | | |
| NON | 75 | | | | | | | |
| ELV, NON | 60 | | | 95 | | | | |

Finishes

STANDARD FINISHES

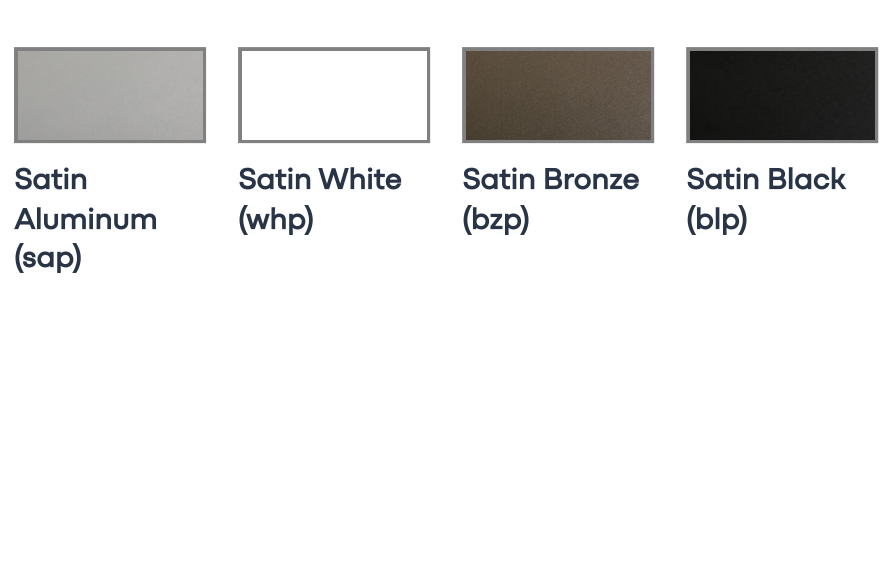

PREMIUM FINISHES



RAL COLORS



Options

Accessory

Mountings

Mountings With A Power Supply