

MacAdam

Ellipses (SDCM)

InRush

Current

CBCP

Operation Ambient

Temperature

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Output Current Circuit Breaker Min Load (W)

(Range)

Diagram

CONE


Dimming

Updated 05/27/2024

(Range)

IES

File

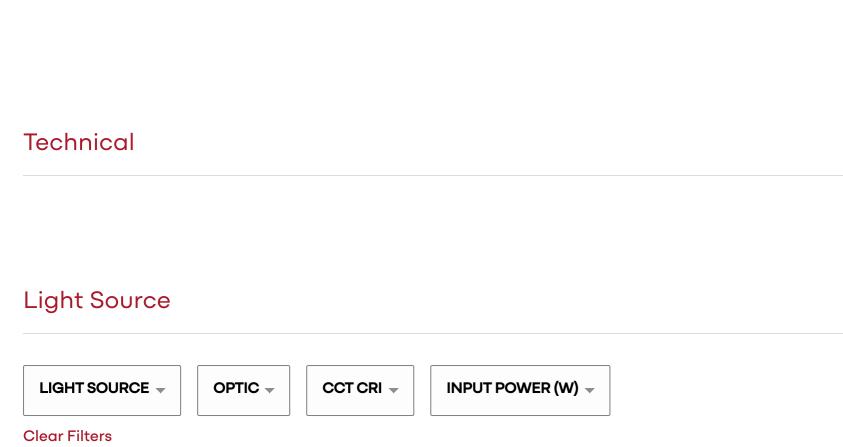

Delivered

THD

(%)

95

Lumens (Lm)

Input

Power

(W)

CRI

Light Optic Source

Clear Filters

(W)

Control

Control

20

NON

NON

NON

Drivers CONTROL -

CCT

INPUT POWER (W) -Input Power Input Power Voltage **Factor**

Transformer MAX LOAD (W) -CONTROL -**Clear Filters** Input Voltage Power Factor THD (%) Operation Ambient Temperature Max Load (W)

10 75 ELV, NON 60 **Finishes**

Options Accesory

Mountings

Mountings With A Power Supply Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

manufacture, use or sell anything it may describe.

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com