
ARTI STAR - Floodlight - Low Voltage Driver - Lamp MR16 Gu5.3 - Brass - Anchor Base - Cap C - Height: 18"



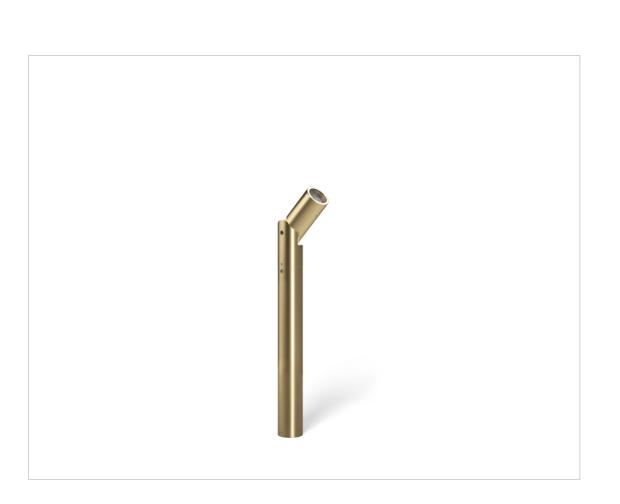

Technical

Light Source

LIGHT SOURCE - OPTIC - CCT CRI - INPUT POWER (W) - Clear Filters Clear Filters												
Light Source	Optic	ССТ (К)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE

Drivers

CONTI	ROL 🔻	NPUT POWEF	R (W) –							
Clear Filt	ters									
Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)

Transformer

CONTRO		DAD (W) 👻						
Clear Filter Control	s Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)

NON	20			
NON	10			
NON	75			
ELV , NON	60	95		
Finishe	S			
Option	S			
Accesc	pry			
Mounti	ngs			

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024