Project Type Date ARTI STAR - Tree Mount - Line Voltage Driver - LED COB - Aluminum - Cap A - 2 Fixtures @ 180° -Strap: 21" Min. To 27" Max. Tree Diameter

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Delivered

THD

(%)

Factor

Lumens (Lm)

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

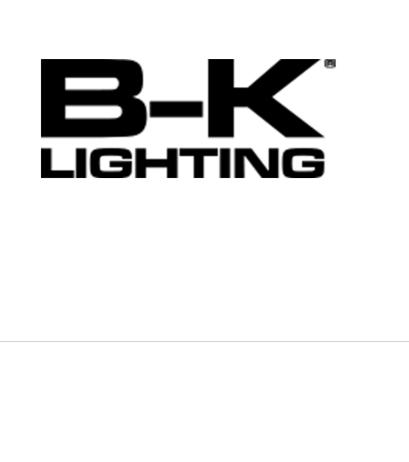



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Technical		
Input voltage:	120-277V, 120V	

OPTIC -LIGHT SOURCE -CCT CRI ▼

Light Source

Clear Filters

Input Light CCT Power Optic CRI Source (W)

Drivers

CONTROL -

INPUT POWER (W) -**Clear Filters**

Input Power Input Power **Control**

Voltage

MAX LOAD (W) -

Input Voltage

95

Max Load (W)

Transformer CONTROL -

Clear Filters

Control

(W)

NON 20 NON 10 NON

75 ELV, NON 60

Finishes

Options

Accesory

Mountings Mountings With A Power Supply

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com