Project Type Date ARTI STAR - Tree Mount - Line Voltage Driver - LED COB - Aluminum - Cap B - 2 Fixtures @ 180° -Strap: 16" Min. To 22" Max. Tree Diameter

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Delivered

THD

(%)

Power Factor

95

Factor

Lumens (Lm)

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

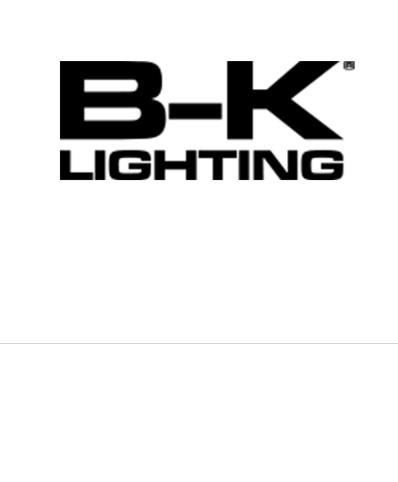



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Input voltage:	120-277V, 120V
11.1.0	
Light Source	

Technical

LIGHT SOURCE -OPTIC -CCT CRI ▼

Clear Filters

Input Light CCT Optic **CRI** Power Source

(W)

Drivers

INPUT POWER (W) -CONTROL -

Clear Filters Input Power Input **Power Control**

Voltage

MAX LOAD (W) -

Input Voltage

CONTROL -

Clear Filters

NON

NON

NON

Transformer

(W)

Max Load (W) **Control** 20 10

75

Finishes

ELV, NON 60

Options

Accesory

Mountings

Mountings With A Power Supply

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com