Project Date Type ARTI STAR - Tree Mount - Line Voltage Driver - LED COB - Aluminum - Cap B - 2 Fixtures @ 180° -Strap: 21" Min. To 27" Max. Tree Diameter

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Delivered

THD

(%)

95

Power

Factor

Lumens (Lm)

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

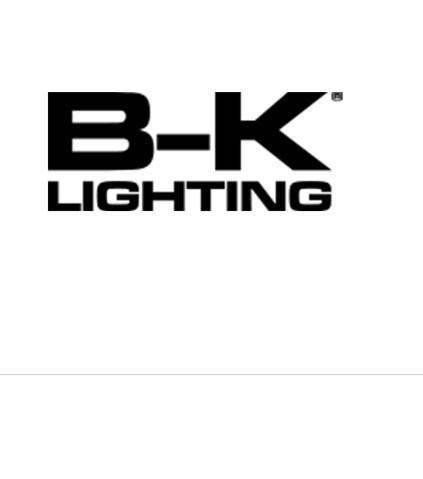



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Input voltage:	120-277V, 120V
Liaht Source	

Technical

LIGHT SOURCE -OPTIC -CCT CRI ▼

Clear Filters

Input Light CCT Optic CRI Source

Power (W)

Drivers

Input Power Input

Control

Control

NON

NON

NON

10

(W)

INPUT POWER (W) -CONTROL -

Clear Filters

Voltage

Transformer MAX LOAD (W) -CONTROL -

Clear Filters Max Load (W) Input Voltage 20

75 ELV, NON 60

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to