
Project Type Date ARTI STAR - Tree Mount - Line Voltage Driver - LED COB - Aluminum - Cap F - 4 Fixtures @ 90° - Strap: 16" Min. To 22" Max. Tree Diameter

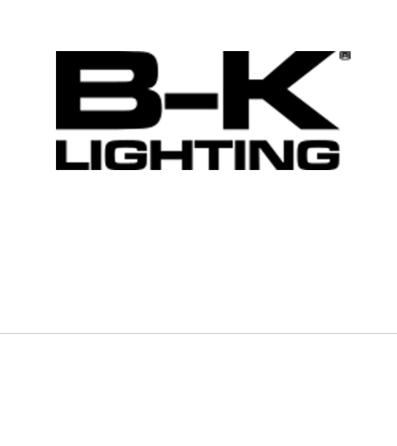

120-277V, 120V

OPTIC -

CRI

CCT CRI ▼

Delivered

THD

(%)

Power Factor

95

Lumens (Lm)

Input

Power

(W)

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

THD (%) Operation Ambient Temperature

Current

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker



Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

LIGHT SOURC	E 🔻
Light Sour	ce

Technical

Input voltage:

Clear Filters

Light CCT Optic Source

Drivers

INPUT POWER (W) -CONTROL -**Clear Filters** Input Power Input **Power Control** (W) Voltage **Factor**

MAX LOAD (W) -

Input Voltage

Transformer

Max Load (W) **Control** 20 10

CONTROL -

Clear Filters

NON

NON

NON

75 ELV, NON 60

Options

Finishes

Accesory Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/26/2024