
Project Type Date ARTI STAR - Tree Mount - Line Voltage Driver - LED COB - Aluminum - Cap F - 4 Fixtures @ 90° - Strap: 26" Min. To 32" Max. Tree Diameter

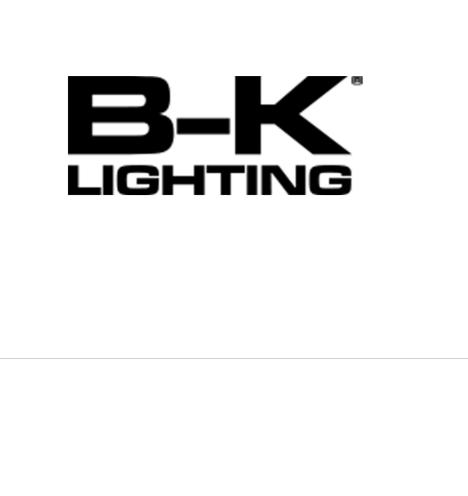

120-277V, 120V

CCT CRI ▼

Delivered

THD

(%)

Lumens (Lm)

Input

Power

CRI

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)



L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

L70

Output Power

(Max-W)

(Hours)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Light Source

Technical

Input voltage:

LIGHT SOURCE -OPTIC -

Clear Filters Light CCT

Optic Source

Clear Filters

(W)

Drivers

INPUT POWER (W) -CONTROL -

Input Power Input **Power Control** (W) Voltage **Factor**

MAX LOAD (W) -

Input Voltage

95

CONTROL -**Clear Filters** Max Load (W)

Control

NON

Transformer

NON 10 NON ELV, NON 60

20

75

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to