**Project** Type Date ARTI STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Cap B - 4 Fixtures @ 90° - Strap: 26" Min. To 32" Max. Tree Diameter

INPUT POWER (W) -

**Operation Ambient** 

Power Factor THD (%) Operation Ambient Temperature

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush


Current

Operating

Output

Current

Current (mA)

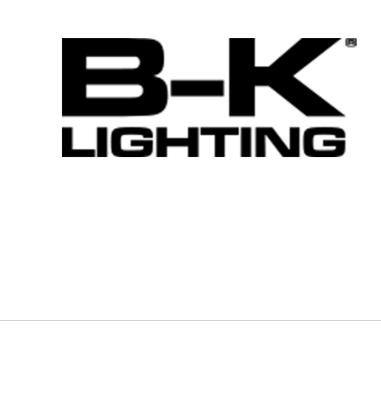

120V, 120-277V

CCT CRI ▼

**Delivered** 

**THD** 

(%)

Lumens (Lm)

Input



L90B10

(Hours)

**Output Voltage** 

(Range)

Output Current Circuit Breaker

L70

**Output Power** 

(Max-W)

(Hours)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

**IES** 

File

| LIGHT SOL | J |
|-----------|---|
|           |   |
|           |   |

**Technical** 

Input voltage:

**Light Source** 

URCE -OPTIC -**Clear Filters** 

Light CCT

Source

Power Optic CRI (W)

**Drivers** 

INPUT POWER (W) -CONTROL -

**Clear Filters** Input Power Input **Power Control** (W) Voltage **Factor** 

Transformer

MAX LOAD (W) -

Input Voltage

95

**Clear Filters** Max Load (W) **Control** NON 20

NON

CONTROL -

NON 75 ELV, NON 60

10

**Finishes** 

**Options** 

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com