Project Type Date ARTI STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Cap F - 6 Fixtures @ 60° - Strap: 21" Min. To 27" Max. Tree Diameter

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush


Current

Operating

Output

Current

Current (mA)

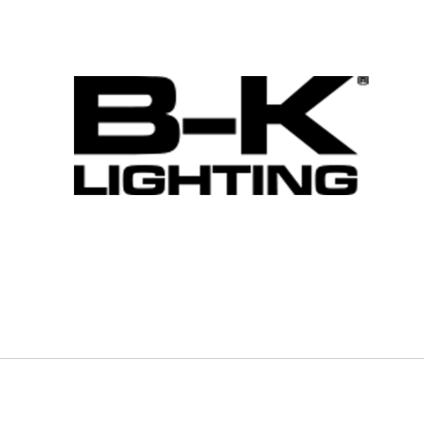

120V, 120-277V

CCT CRI ▼

Delivered

THD

(%)

Lumens (Lm)



L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

L70

Output Power

(Max-W)

(Hours)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Light Source

Technical

Input voltage:

LIGHT SOURCE -OPTIC -

Clear Filters Input Light CCT

Power Optic CRI Source (W)

Drivers

CONTROL -**Clear Filters**

INPUT POWER (W) -

Power

Transformer

CONTROL -

Control (W) Voltage **Factor**

MAX LOAD (W) -

Input Voltage

95

Input Power Input

Max Load (W)

20

10

75

Clear Filters Control NON

NON

NON

ELV, NON 60

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com