
Project Type Date ARTI STAR - Wall Mount - Low Voltage Driver - Lamp MR16 Gu5.3 - Aluminum - Surface Mount -Cap B - Height: 18" LIGHTING LIGHTING

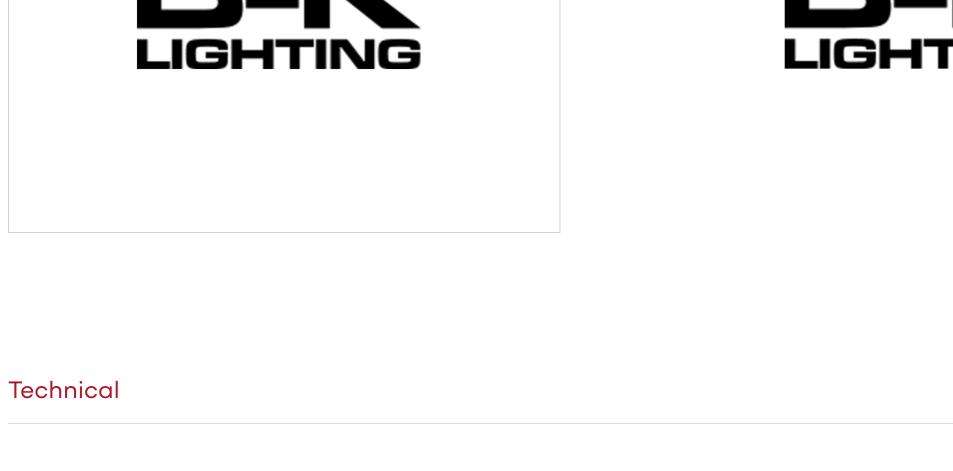

Input

Power

(W)

Power

Factor

CRI

INPUT POWER (W) -

Voltage

MAX LOAD (W) -

Delivered

THD

(%)

95

Lumens (Lm)

CCT

Optic

Input Power Input

Max Load (W)

20

10

75

Light

Source

Drivers

CONTROL -

(W)

Transformer

CONTROL -

Clear Filters

Control

NON

NON

NON

ELV, NON 60

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Clear Filters

Control

INPUT POWER (W) -LIGHT SOURCE -OPTIC -CCT CRI -**Clear Filters**

CBCP

Operation Ambient

Input Voltage Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Output Current Circuit Breaker Min Load (W)

(Range)

Diagram

CONE

Dimming

Updated 05/27/2024

(Range)

IES

File

Light Source