Project Type Date

ARTI STAR - Wall Mount - Remote Driver - LED COB - Aluminum - Surface Mount - Cap D - Height: 18"

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

Output Current Circuit Breaker Min Load (W)

(Range)

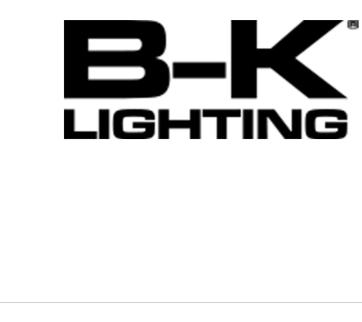

120-277V, 120V

CCT CRI ▼

Delivered

Lumens (Lm)



Diagram

CONE

Dimming

(Range)

IES

File

Light Source

Input voltage:

Technical

LIGHT SOURCE -OPTIC -

Clear Filters

Light Source

Input

CRI Power Optic (W)

Input Power Input

Voltage

MAX LOAD (W) -

Drivers

Clear Filters

(W)

Control

CONTROL -INPUT POWER (W) -

Power

Factor

THD

(%)

95

Transformer

CONTROL -

Clear Filters

Max Load (W) Input Voltage Power Factor THD (%) Operation Ambient Temperature **Control** NON 20

NON 10 NON 75 ELV, NON 60

Finishes

Options

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Accesory

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024