
Date	Project	Туре	

ARTI STAR - Wall Mount - Remote Driver - LED COB - Aluminum - Surface Mount - Cap F - Height: 18"



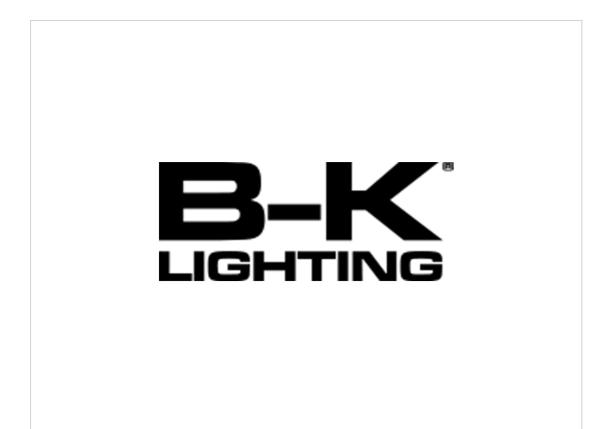

Technical

Input voltage: 120-277V, 120V

Light Source

LIGHT SC Clear Filter		ОР		CCT CRI		OWER (W)	•					
Light Source	Optic	ССТ (К)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE

Drivers

CONT	ROL -	NPUT POWEI	₹(W) –							
Clear Filt	ers									
Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)

Transformer

CONTRO		DAD (W) -						
Clear Filters	S							
Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)

NON	20		
NON	10		
NON	75		
ELV , NON	60	95	
Finishe			
Option	S		
A			
Accesc	bry		
Mounti	ings		

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024