**Project** Type Date CAMINO STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Aluminum -Anchor Base - Style G2 - Height: 12"

INPUT POWER (W) -

**Operation Ambient** 

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Operating

Output

Current

Current (mA)

L70

**Output Power** 

**Output Current** 

(Max-W)

(Hours)


L90B10

(Hours)

**Output Voltage** 

**Circuit Breaker** 

(Range)

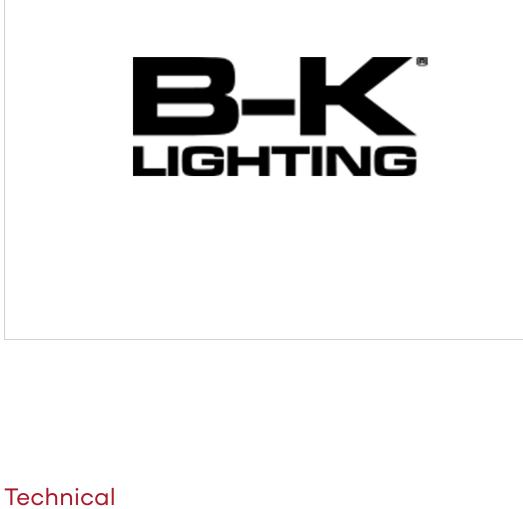

120V, 120-277V

OPTIC -

CCT CRI 🔻

Power

**Power** 

**Factor** 

**Delivered** 

THD

**Power Factor** 

(%)

Lumens (Lm)



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

**IES** 

File

LIGHT SOURCE	•

Input voltage:

**Light Source** 

**Clear Filters** Input

Light CCT Optic CRI Source

(W)

CONTROL -**Clear Filters** 

Control

**Drivers** 

Input Power Input

INPUT POWER (W) -

Voltage

MAX LOAD (W) -

Input Voltage

Transformer

(W)

**Clear Filters** Control Max Load (W)

NON

CONTROL -

NON 10

20

**Finishes** 

**Options** 

Accesory Mountings

Mountings With A Power Supply Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com