
**Project** Type Date CAMINO STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Brass - Anchor Base - Style G - Height: 18"

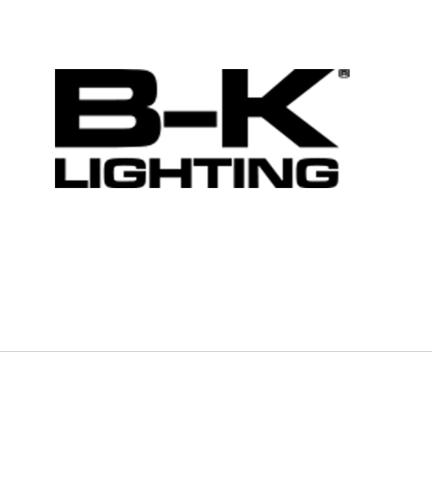

120V, 120-277V

OPTIC -

CRI

CCT CRI 🔻

**Delivered** 

THD

**Power Factor** 

(%)

Lumens (Lm)

Input

Power

(W)

**Power** 

**Factor** 

INPUT POWER (W) -

**Operation Ambient** 

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Operating

Output

Current

Current (mA)

L70

**Output Power** 

**Output Current** 

(Max-W)

(Hours)

L90B10

(Hours)

**Output Voltage** 

**Circuit Breaker** 

(Range)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

**IES** 

File



Light Source
LIGHT SOURCE -

**Technical** 

Input voltage:

**Clear Filters** 

Light CCT Optic Source

**Drivers** 

**Clear Filters** Input Power Input **Control** (W)

INPUT POWER (W) -CONTROL -

Voltage

MAX LOAD (W) -

Input Voltage

Transformer

CONTROL -

Control Max Load (W) NON 20 NON 10

**Clear Filters** 

**Finishes** 

**Options** 

Accesory

Mountings Mountings With A Power Supply Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com