
Project Type Date CAMINO STAR - Bollard - Line Voltage Via Transformer - LED High-Power - Brass - Anchor Base - Style K - Height: 12"

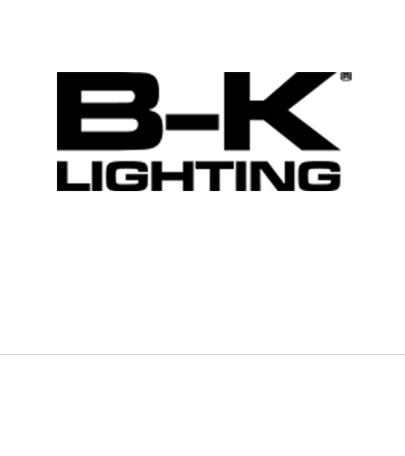

120V, 120-277V

OPTIC -

CCT CRI ▼

Delivered

THD

Power Factor

(%)

Lumens (Lm)

Input

Power

Factor

INPUT POWER (W) -

Operation Ambient

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)



Diagram

CONE

Dimming

Min Load (W)

Updated 05/27/2024

(Range)

IES

File

|--|

Technical

Input voltage:

Clear Filters

Light Optic Source

CCT Power CRI (W)

Drivers

Clear Filters Input Power Input **Control** (W)

CONTROL -

CONTROL -

NON

NON

INPUT POWER (W) -

Transformer

MAX LOAD (W) -

Voltage

Clear Filters Control Max Load (W) Input Voltage 20 10

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com