
Project Type Date

CENTAURI - Floodlight - Line Voltage Driver -Lamp Low Pressure Sodium - Aluminum - Knuckle Slipfitter - 3 Sided Shield - 35W



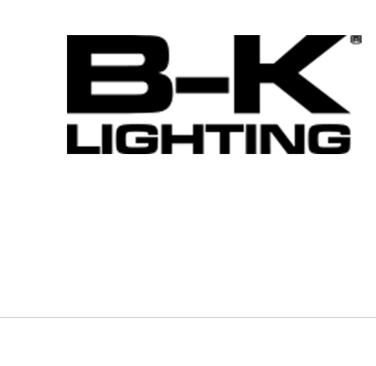

LIGHT SOURCE -

Clear Filters

Light

Source

Technical

Light Source

Drivers

CONTROL -

(W)

Transformer

CONTROL -

Control Max Load (W)

Clear Filters

Finishes

Clear Filters

Control

Input Power Input

Voltage

MAX LOAD (W) -

Input Voltage

CCT

Optic

OPTIC -

CRI

INPUT POWER (W) -

Power

Factor

THD

(%)

Power Factor

Delivered

Lumens (Lm)

CCT CRI -

Input

Power

(W)

Operation Ambient Temperature

INPUT POWER (W) -

CBCP

InRush Current

MacAdam

Ellipses (SDCM)

THD (%) Operation Ambient Temperature

Output

Current

Operating

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Current

Circuit Breaker

Output Voltage

(Range)

Min Load (W)

Updated 05/26/2024

Dimming

(Range)

Diagram

CONE

IES

File

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to