
Project Date Type DENALI - Bollard - Line Voltage Driver - LED COB - Aluminum - In-Grade HP2 - Cap D - Style C - 2



Fixtures - Height: 24"

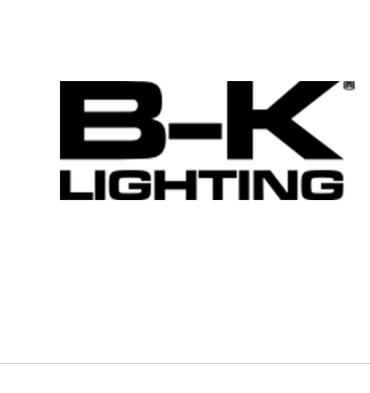

Operating

Output

Current

Current (mA)

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Input voltage:

CCT(K):

CRI:

Technical

Light Source OPTIC -LIGHT SOURCE -

INPUT POWER (W) -CCT CRI -

2700, 3000, 4000, 3500

120-277V, 120V

Ra > 80, R9 > 15, Ra > 90, R9 > 50, Ra > 80, R9 > 15

THD

(%)

Power Factor

Power

Factor

Input Voltage

Operation Ambient

Temperature

Clear Filters Input Light **Delivered** Optic CRI Power Lumens (Lm) Source

CBCP (W)

Drivers

INPUT POWER (W) -

Input

Voltage

Input Power **Control** (W)

Transformer

Control Max Load (W)

Clear Filters

CONTROL -

MAX LOAD (W) -CONTROL -**Clear Filters**

Finishes

Options

Mountings With A Power Supply

Mountings

Accesory

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to