
Project Date Type

DENALI - Tree Mount - Line Voltage Driver - LED Color Tuning - Aluminum - Cap A - 3 Fixtures @ 120° - Strap: 21" Min. To 27" Max. Tree Diameter



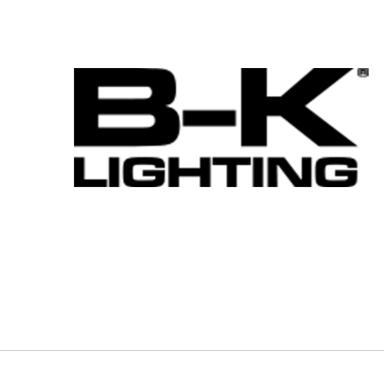

Operating

Output

Current

Current (mA)

MacAdam

Ellipses (SDCM)

InRush

Current

Operation Ambient Temperature

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/27/2024

(Range)

IES

File

Input voltage:

Light Source

CCT(K):

CRI:

Technical

INPUT POWER (W) -OPTIC -LIGHT SOURCE -CCT CRI -

2700, 3000, 4000, 3500

120-277V

Ra > 80, R9 > 15, Ra > 90, R9 > 50, Ra > 80, R9 > 15

THD

(%)

Power Factor

Operation Ambient

THD (%)

Temperature

Source

Clear Filters

Input Light **Delivered CBCP**

Optic CRI Power Lumens (Lm) (W)

Drivers

CONTROL -

Clear Filters

Control

Power

Factor

INPUT POWER (W) -

Input

Voltage

MAX LOAD (W) -

Transformer

CONTROL -

Clear Filters Control Max Load (W) Input Voltage

Input Power

(W)

Finishes

Options

Mountings With A Power Supply

Mountings

Accesory

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com