
**Project** Type Date GOLD STAR - In-Grade - Low Voltage Driver -Lamp MR16 Gu5.3 - Aluminum - Round - Faceplate Surface Mount



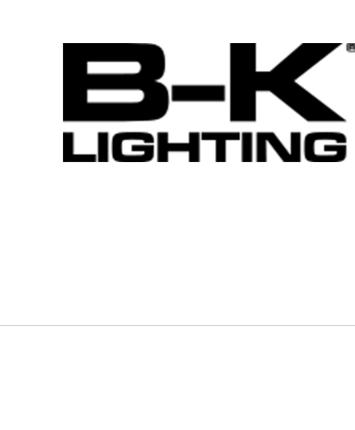

LIGHT SOURCE -**Clear Filters** 

Light

Source

**Drivers** 

CONTROL -

(W)

Transformer

CONTROL -

**Clear Filters** 

**Control** 

NON

NON

NON

ELV, NON

**Finishes** 

**Options** 

Accesory

**Clear Filters** 

Control

**Technical** 

**Light Source** 

Input Power Input

Max Load (W)

20

10

60

75

Voltage

MAX LOAD (W) -

Input Voltage

95

95

CCT

Optic

INPUT POWER (W) -

OPTIC -

**CRI** 

**THD** Power **Factor** 

CCT CRI -

Input

Power

(W)

**Operation Ambient** (%) **Temperature** 

**Delivered** 

Lumens (Lm)

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

INPUT POWER (W) -

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

**Output Power** 

(Max-W)

(Hours)

L90B10

(Hours)

**Output Voltage** 

(Range)

Power Factor THD (%) Operation Ambient Temperature

Output Current Circuit Breaker Min Load (W)

Updated 05/28/2024

Diagram

CONE

Dimming

(Range)

**IES** 

File

Mountings Mountings With A Power Supply

manufacture, use or sell anything it may describe.