
**Project** Type Date MICRO NITE - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Cap A - 6 Fixtures @ 60° - Strap: 21" Min. To 27" Max. Tree Diameter LIGHTING

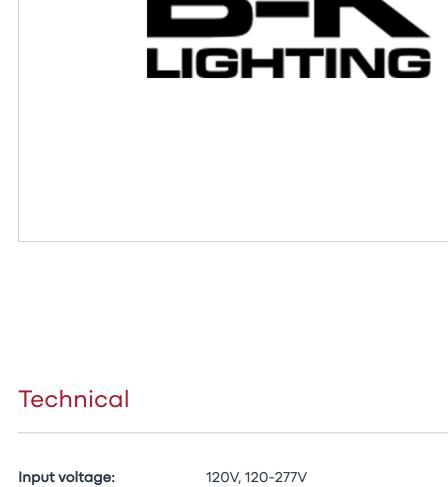

**Light Source** 

**Options** 

Accesory

Mountings

manufacture, use or sell anything it may describe.



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

LIGHT SOURCE -	OPTIC -	CCT CR	RI - INPUT P	POWER (W)					
Clear Filters									
Light Optic Source	CCT (K)	Input Power (W)	Delivered Lumens (Lm)	(:H(:D	acAdam lipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File
Drivers									
CONTROL •	INPUT POWER (	W) •							
Clear Filters									
Transformer		Factor	(%) Tempero	ature	Current	Current	(Max-W)	(Range)	
CONTROL   Clear Filters	MAX LOAD (W)	<b>V</b>							
Control Max Load	d (W) Input Vo	oltage Por	wer Factor THE	O (%) Operati	ion Ambient Te	mperature	Output Current	Circuit Br	eaker
NON 20									
NON 10									
Finishes									

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to