
**Project** Type Date MINI MICRO - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Cap A - 2 Fixtures @ 180° - Strap: 16" Min. To 22" Max. Tree Diameter

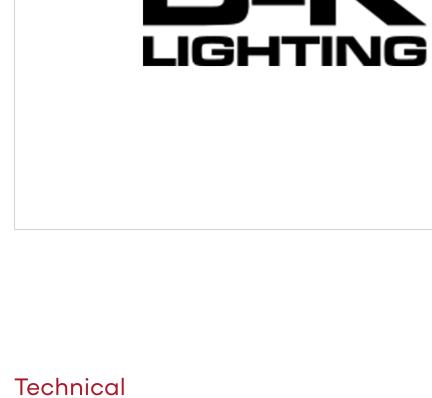

120V, 120-277V

OPTIC -

CCT CRI -

Input voltage:

**Light Source** 

LIGHT SOURCE -

**Options** 

Accesory

Mountings

manufacture, use or sell anything it may describe.



Diagram

CONE

**Dimming** 

Min Load (W)

(Range)

Clear Filt	ers										
Light Source	Optic	CCT (K)	CRI	nput Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 ) (Hours)	L90B10 (Hours)	IES File
Driver	'S										
<b>CONTR</b> Clear Filt		INPUT P	OWER (W)	•							
Control	Input Powe	er Input Voltag			THD Operati %) Temper	on Ambient	InRush	Output	Output Power (Max-W)	Output V (Range)	oltage
Trans	former	MAYLO	AD (W) ~								
Clear Filte		MAX LO	AD (VV) ▼								
Control	Max Loa	d (W)	nput Volto	ige Powe	er Factor TH	D (%) Ope	ration Ambient Te	mperature	Output Current	Circuit B	reaker
NON	20										
NON	10										

INPUT POWER (W) -

## Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/28/2024