
**Project** Type Date MINI MICRO - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Cap B - 4 Fixtures @ 90° - Strap: 26" Min. To 32" Max. Tree Diameter



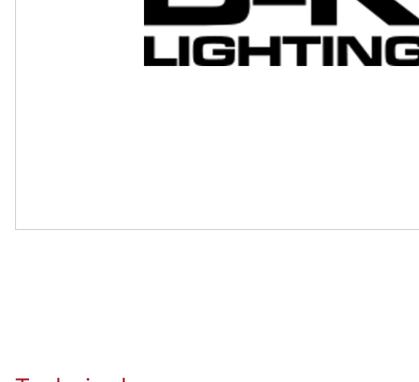

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

**IES** 

File

**Output Voltage** 

**Circuit Breaker** 

(Range)

Technical								
Input voltage:	120V, 120-27	7V						
Light Source								
LIGHT SOURCE -	OPTIC -	CCT CRI	INPUT PO	OWER (W)				
Clear Filters  Light	CCT CRI	Input	Delivered		MacAdam	Operating	L70	L90B10
	(K) CRI	Power (W)	Lumens (Lm)	CBCP	Ellipses (SDCM)	Current (mA)	(Hours)	(Hours)

**Drivers** INPUT POWER (W) -CONTROL -**Clear Filters** 

Input Power

(W)

**Control** 

NON

NON

Input

Voltage

**THD** 

(%)

**Power** 

**Factor** 

**Operation Ambient** 

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

**Temperature** 

InRush

Current

Output

Current

**Output Power** 

**Output Current** 

(Max-W)

Transformer MAX LOAD (W) -CONTROL -

**Clear Filters** Max Load (W) Input Voltage 20 10

**Finishes** 

**Options** Accesory

Mountings Mountings With A Power Supply

manufacture, use or sell anything it may describe.