
Project Type Date MINI MICRO - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Cap C - 2 Fixtures @ 180° - Strap: 26" Min. To 32" Max. Tree Diameter LIGHTING

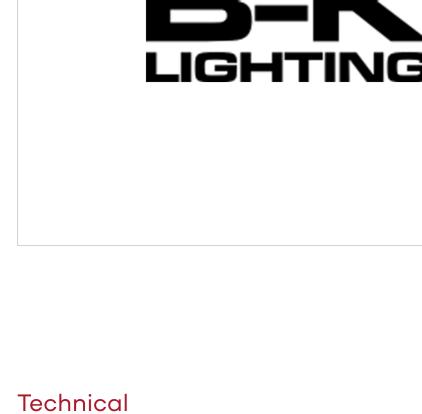

120V, 120-277V

OPTIC -

CCT CRI -

Input voltage:

Light Source

LIGHT SOURCE -

Options

Accesory

Mountings

manufacture, use or sell anything it may describe.



Diagram

CONE

Dimming

Min Load (W)

(Range)

	ers										
Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES Fil€
Oriver	'S										
CONTR Clear Filt		INPUT P	POWER ((W) •							
Control	Input Powe	er Input		Power	THD Operation	n Ambient	InRush	Output	Output Power	Output Vo	oltage
Trans [.]	former	MAX LO	AD (W)	▼							
	ROL 🔻	MAX LO	AD (W)	\							
CONTR	ROL 🔻		AD (W)		ower Factor THD	(%) Ope	ration Ambient Ter	mperature	Output Current	Circuit Br	reaker
CONTR Clear Filte	ROL ▼				ower Factor THD	(%) Ope	ration Ambient Ter	mperature	Output Current	Circuit Br	reaker
CONTR Clear Filte Control	ROL ▼				ower Factor THD	(%) Ope	ration Ambient Ter	mperature	Output Current	Circuit Br	eaker

INPUT POWER (W) -

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/28/2024