
Project Type Date MINI MICRO - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Cap A - 6 Fixtures @ 60° - Strap: 26" Min. To 32" Max. Tree Diameter

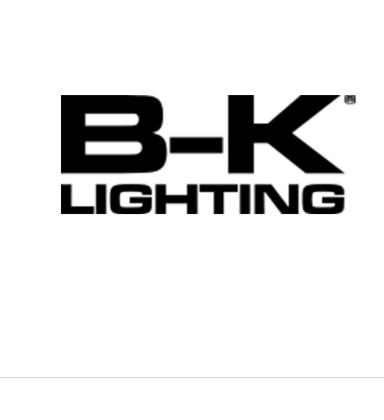

120V, 120-277V

OPTIC -

CCT CRI ▼

Delivered

THD

Power Factor

(%)

Lumens (Lm)

Input

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

THD (%) Operation Ambient Temperature

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Current

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)



Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File

Light Source

Technical

Input voltage:

Clear Filters

Light CCT Optic Source

LIGHT SOURCE -

Power CRI

(W)

Drivers

INPUT POWER (W) -CONTROL -

Clear Filters Input Power Input **Power Control** (W) Voltage **Factor**

CONTROL -

Clear Filters

Control

NON

NON

Transformer

10

Max Load (W)

20

MAX LOAD (W) -

Input Voltage

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com