

# NITE STAR - Floodlight - Low Voltage Driver - Lamp MR16 Gu5.3 - Brass - Round - Threaded Knuckle Mount - Cap F



## Technical

**Lens:** Clear (Standard), Spread, Soft Focus, Rectilinear  
**Shielding:** Not included (Standard), Honeycomb Baffle

## Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
--------------	-------	---------	-----	-----------------	-----------------------	------	-------------------------	------------------------	-------------	----------------	----------	--------------

## Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

## Transformer

Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

NON 20

NON 10

ELV, NON 60


NON 75

95

95

## Finishes


### STANDARD FINISHES

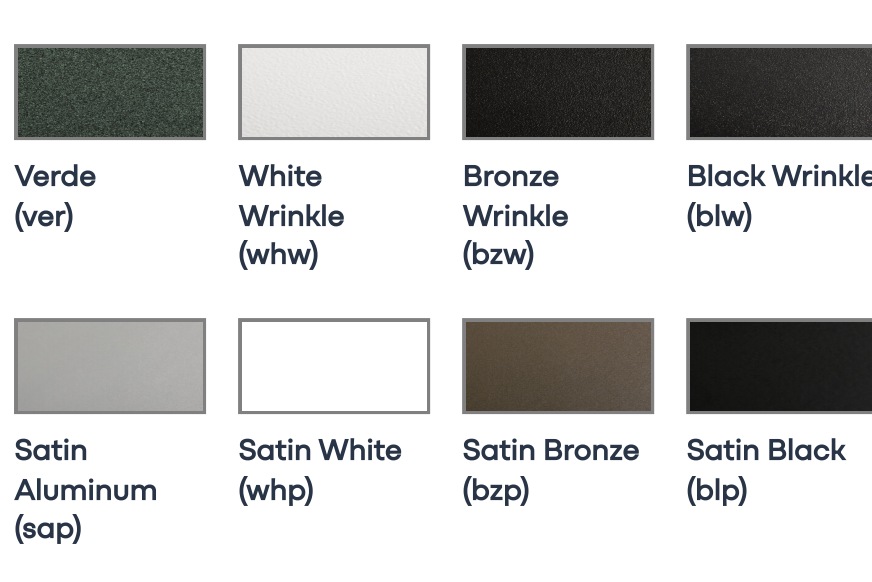

### PREMIUM FINISHES



### RAL COLORS

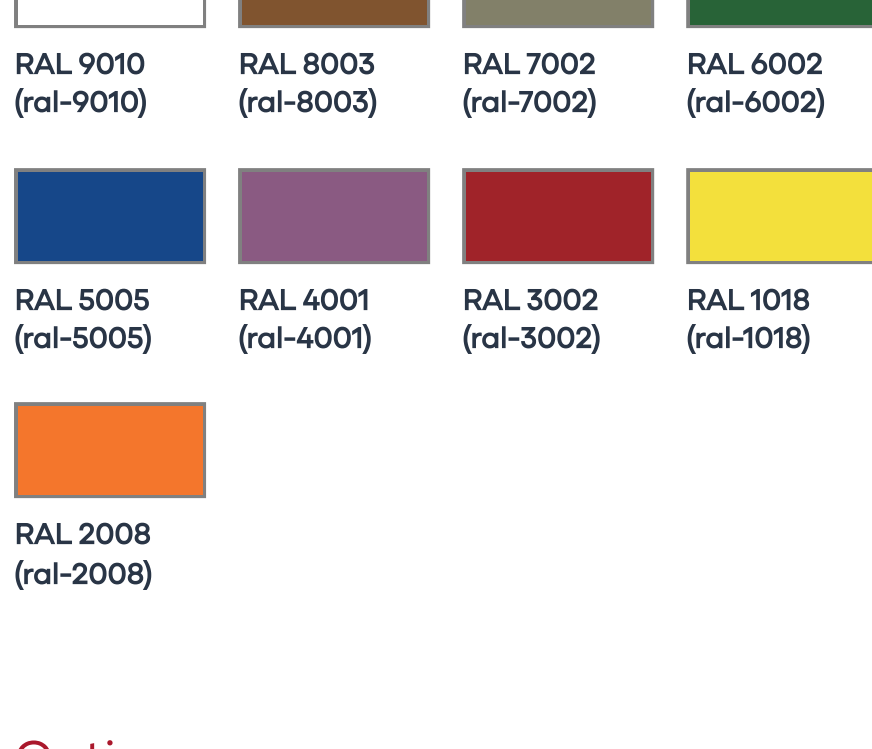

### BRASS FINISHES



## Options

## Accessory

## Mountings

## Mountings With A Power Supply