
Project Date Type NITE STAR - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Round - Cap B - 6 Fixtures @ 60° - Strap: 31" Min. To 38" Max. Tree Diameter LIGHTING

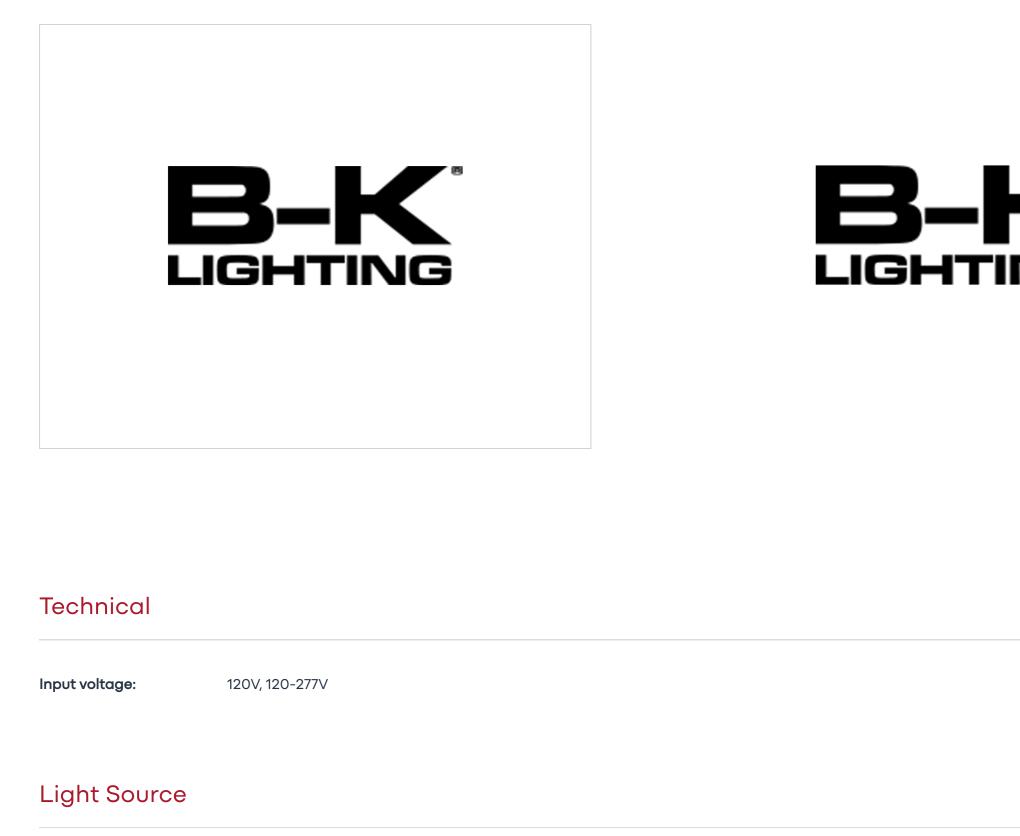

INPUT POWER (W) -LIGHT SOURCE -OPTIC -CCT CRI -

Input **Delivered** MacAdam Operating L70 L90B10 Light CCT **IES** CRI Power **CBCP** Optic

Clear Filters Source Lumens (Lm) Ellipses (SDCM) Current (mA) (Hours) File (Hours) (W)

CONE

Output Voltage

(Range)

Output Current Circuit Breaker

Dimming

Min Load (W)

Updated 05/26/2024

(Range)

Drivers

CONTROL -

Input Power

(W)

Transformer

CONTROL -

Clear Filters

Control

NON

NON

NON

ELV, NON

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Clear Filters

Control

INPUT POWER (W) -

Power

Factor

THD

(%)

95

95

Operation Ambient

Input Voltage Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

InRush

Current

Output

Current

Output Power

(Max-W)

Input

Voltage

MAX LOAD (W) -

Max Load (W)

20

10

60

75

Diagram