
NITE STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Round - Cap A - 6

NITE STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Round - Cap A - 6 Fixtures @ 60° - Strap: 26" Min. To 32" Max. Tree Diameter



Mountings With A Power Supply

manufacture, use or sell anything it may describe.

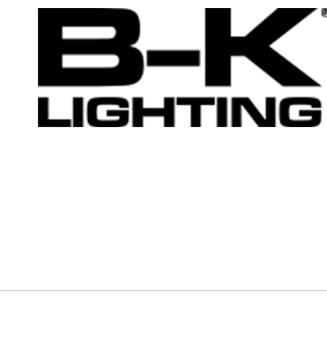

Technical									
Input voltage:	120V, 120-277V								
Light Source									
LIGHT SOURCE -	OPTIC - C	CT CRI V INPUT P	POWER (W)						
Clear Filters									
Light Optic Source	CCT CRI Pow (K) (W)	LIGHWARA	CBCP MacA Ellips	.dam Op es (SDCM) Cu	perating urrent (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
Drivers									
CONTROL ~	INPUT POWER (W)								
Clear Filters									
Control Input Power (W)	r Input Power Voltage Factor					utput Power lax-W)	Output Vo (Range)	ltage	Dimming (Range)
CONTROL ▼ Clear Filters	MAX LOAD (W) ▼								
Control Max Loc	ıd (W) Input Voltage	Power Factor TH	ID (%) Operation	Ambient Tempe	erature Ou	tput Current	Circuit Br	eaker	Min Load (W)
NON 20									
NON 10									
ELV, NON 60		95							
NON 75		95							
Finishes									
Options									
Accesory									
Mountings									

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/28/2024