
Project Type Date NITE STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Round - Cap C - 4 Fixtures @ 90° - Strap: 21" Min. To 27" Max. Tree Diameter



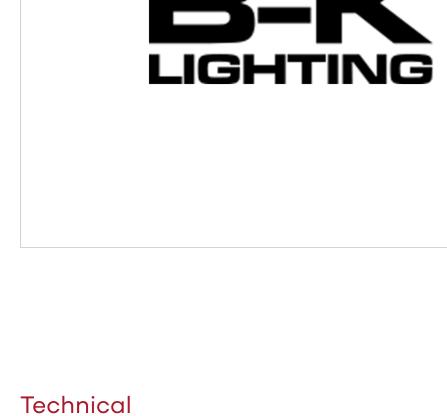

CCT	out Delivered Lumens (L	JT POWER (W)	MacAdam Ellipses (SDCM)	Operating Current (mA)		90B10 IES Hours) File	Diagram CONE
CCT CRI PO	out Delivered Lumens (L	CBCP	MacAdam				
(K) CRI PO	bwer Lumens (L	m) CBCP					
(K) CRI PO	bwer Lumens (L	m) CBCP					
INPUT POWER (W)							
INPUT POWER (W)							
			InRush Current				Dimming (Range)
MAX LOAD (W) -							
				mporaturo Out	tput Current	Circuit Breaker	Min Load (V
ad (W) Input Volta	ge Power Factor	THD (%) Ope	eration Ambient Te	imperature Out	-		•
ad (W) Input Volta	ge Power Factor	THD (%) Ope	eration Ambient Tei	imperatore Out	-		•
ad (W) Input Volta	ge Power Factor	THD (%) Ope	eration Ambient Tei	imperatore Out	-		
ad (W) Input Volta	ge Power Factor 95	THD (%) Ope	eration Ambient Tei	imperatore Out			
	Voltage Fact	Voltage Factor (%) Temp	Voltage Factor (%) Temperature	Voltage Factor (%) Temperature Current	Voltage Factor (%) Temperature Current (Mo	Voltage Factor (%) Temperature Current Current (Max-W)	Voltage Factor (%) Temperature Current Current (Max-W) (Range)

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Options

Accesory

Mountings

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024