
NITE STAR - Tree Mount - Low Voltage Driver - LED High-Power - Aluminum - Round - Cap F - 4 Fixtures @ 90° - Strap: 31" Min. To 38" Max. Tree



Diameter

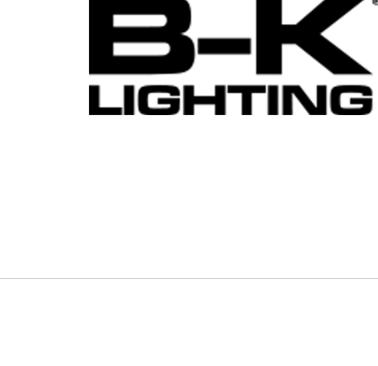

Technical							
Input voltage: 120V, 120-277	V						
Light Source							
LIGHT SOURCE - OPTIC -	CCT CRI - INPUT	POWER (W) -					
Clear Filters	loout						
Source Optic (K) CRI	Input Power (W) Delivered Lumens (Lm)	(:K(:P	acAdam lipses (SDCM)	Operating Current (m.A	L70 A) (Hours)	L90B10 IES (Hours) File	Diagram CONE
Drivers							
CONTROL VINPUT POWER (W) 🔻						
Clear Filters							
Control	ower THD Operat actor (%) Tempe	tion Ambient rature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
(11)	(10)				((1111)30)	(130.9-)
Transformer							
CONTROL MAX LOAD (W)							
Clear Filters Control Max Load (W) Input Vol	tage Power Factor T	THD (%) Operat	tion Ambient Te	emperature	Output Current	Circuit Breaker	Min Load (W)
NON 20	tago i onoi i dotoi - i	115 (76)		inportation o	Cotpot Contone		· 2344 (**)
NON 10							
ELV, NON 60	95						
NON 75	95						
Finishes							
Options							
Accesory							
Mountings							
Mountings With A Power	Supply						

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

manufacture, use or sell anything it may describe.

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/28/2024