
Project Type Date RIO - Floodlight - Line Voltage Driver - Laser - Aluminum - Round - Threaded Knuckle Mount -Cap D LIGHTING

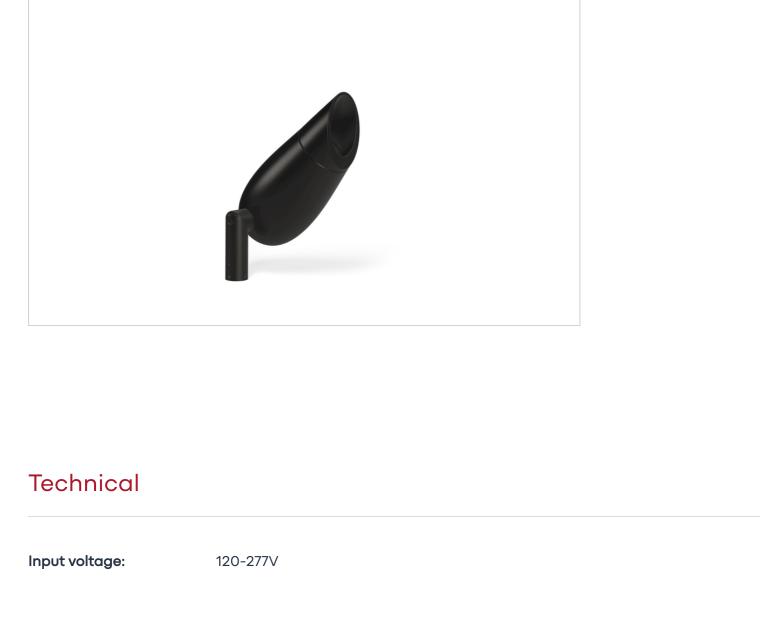

CCT CRI ▼

Delivered

THD

Power Factor

(%)

Lumens (Lm)

Input

Power

(W)

CRI

INPUT POWER (W) -

Operation Ambient

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/27/2024

(Range)

IES

File



Light Source LIGHT SOURCE -

OPTIC -

Clear Filters Light

Clear Filters

(W)

Transformer

CONTROL -

Control Max Load (W)

Clear Filters

Finishes

Options

Control

CCT Optic Source

Drivers

INPUT POWER (W) -CONTROL -

> Input Power Input Power Voltage **Factor**

> > MAX LOAD (W) -

Input Voltage

Accesory Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.