Project Type Date

RIO - Pole Top - Line Voltage Driver - LED High-Power - Aluminum - Round - Cap D - Single

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

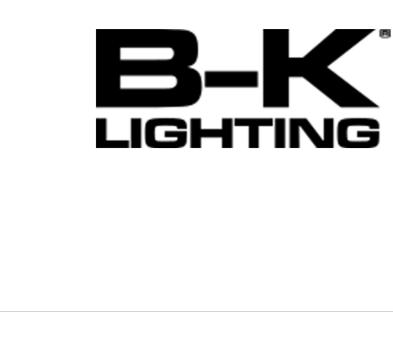

120V, 120-277V

CCT CRI ▼

Delivered

THD

(%)

Lumens (Lm)



Diagram

CONE

Dimming

Min Load (W)

Updated 05/26/2024

(Range)

IES

File

Light Source

Technical

Input voltage:

LIGHT SOURCE -OPTIC -

Clear Filters

Input Light

CRI Power Optic Source (W)

Drivers

CONTROL -

Clear Filters

Input Power Input Power **Control** (W) Voltage **Factor**

INPUT POWER (W) -

MAX LOAD (W) -

Input Voltage

CONTROL -

Clear Filters

Transformer

Control Max Load (W)

Finishes

Options

Mountings With A Power Supply

Mountings

Accesory

manufacture, use or sell anything it may describe.