
Project Type Date VERSA STAR - Ceiling Recessed - Low Voltage Driver - LED High-Power - Stainless Steel - Round -Junction Box - Faceplate: Louvered - Pattern C LIGHTING LIGHTING

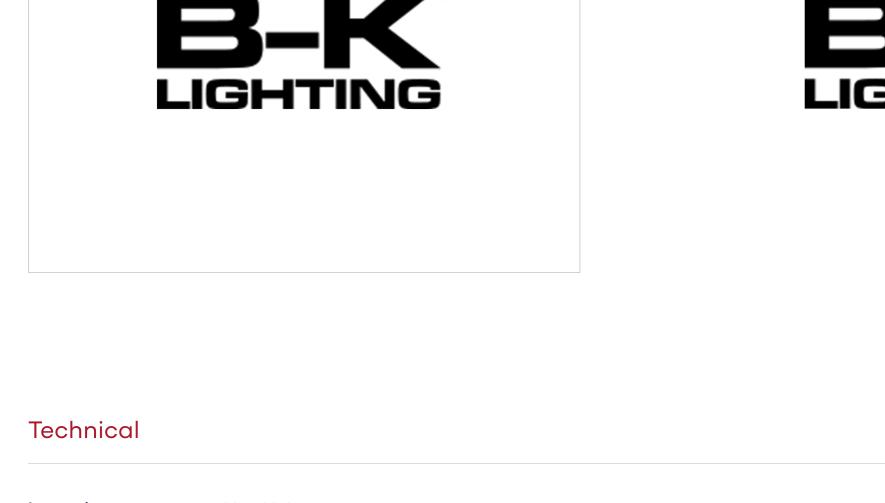

Input

Power

(W)

Power

Factor

CRI

INPUT POWER (W) -

Voltage

MAX LOAD (W) -

Input Voltage

95

95

Delivered

THD

(%)

Lumens (Lm)

CCT

Optic

Input Power Input

Max Load (W)

20

10

60

75

Clear Filters

Light

Source

Drivers

CONTROL -

(W)

Transformer

CONTROL -

Clear Filters

Control

NON

NON

NON

ELV, NON

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Clear Filters

Control

120V, 120-277V

Input voltage:

Light Source

INPUT POWER (W) -LIGHT SOURCE -OPTIC -CCT CRI ▼

CBCP

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Temperature

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

L70

Output Power

(Max-W)

(Hours)

Diagram

CONE

Dimming

Min Load (W)

Updated 05/28/2024

(Range)

IES

File