


ARTI STAR - Catenary - Line Voltage Via Transformer - LED High-Power - Stainless Steel - Cap C

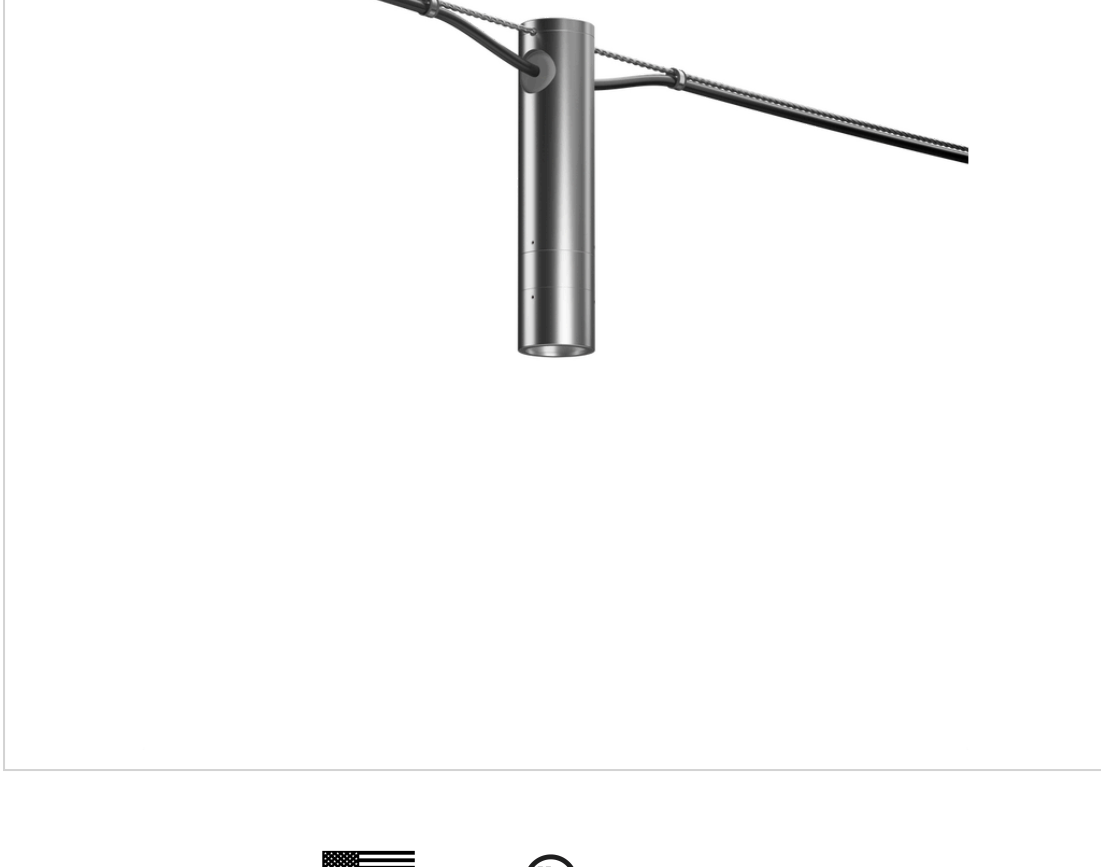

Technical

| | | | |
|---------------------------|---|-----------------------|---|
| CCT(K): | 2700, 3000, 4000, 1500 | Certification: | , UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards., RoHS compliant components. |
| CRI: | Ra > 80, R9 > 15, -, Ra > 90, R9 > 50 | | |
| Delivered Lumens: | - | | |
| Lens: | Soft Focus, Rectilinear | | |
| Shielding: | Not included (Standard), Honeycomb Baffle | | |
| Adjustable output: | A1, A2, A3, A4, A5, A6, A7, A8, A9 (Standard) | | |
| Option: | Internal Secondary Wire Clamp | | |
| Weight: | 5.57 | | |
| Input voltage: | 120V, 120-277V | | |
| IP Rating: | IP66 | | |

Light Source

LIGHT SOURCE ▾ **OPTIC** ▾ **CCT CRI** ▾ **INPUT POWER (W)** ▾

Clear Filters

| Light Source | Optic | CCT (K) | CRI | Input Power (W) | Delivered Lumens (Lm) | CBCP | MacAdam Ellipses (SDCM) | Operating Current (mA) | L70 (Hours) | L90B10 (Hours) | IES File | Diagram CONE |
|--------------|------------------|---------|------------------|-----------------|-----------------------|------|-------------------------|------------------------|-------------|----------------|----------|--------------|
| e64 | Spot (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e65 | Medium Flood (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e65 | Narrow Spot (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e65 | Spot (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e65 | Spot (°) | 3000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e66 | Medium Flood (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e66 | Narrow Spot (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e66 | Spot (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e66 | Spot (°) | 4000 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e74 | Medium Flood (°) | 1500 | - | | | | 2 | | | | | |
| e74 | Narrow Spot (°) | 1500 | - | | | | 2 | | | | | |
| e74 | Spot (°) | 1500 | - | | | | 2 | | | | | |
| e74 | Spot (°) | 1500 | - | | | | 2 | | | | | |
| e79 | Medium Flood (°) | 2700 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e79 | Narrow Spot (°) | 2700 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e79 | Spot (°) | 2700 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e79 | Spot (°) | 2700 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e80 | Medium Flood (°) | 3000 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e80 | Narrow Spot (°) | 3000 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e80 | Spot (°) | 3000 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e80 | Spot (°) | 3000 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e81 | Medium Flood (°) | 3500 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e81 | Narrow Spot (°) | 3500 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e81 | Spot (°) | 3500 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e81 | Spot (°) | 3500 | Ra > 90, R9 > 50 | | | | 2 | | | | | |
| e64 | Medium Flood (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e64 | Narrow Spot (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |
| e64 | Spot (°) | 2700 | Ra > 80, R9 > 15 | | | | 2 | | | | | |

Drivers

CONTROL ▾ **INPUT POWER (W)** ▾

Clear Filters

| Control | Input Power (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | InRush Current | Output Current | Output Power (Max-W) | Output Voltage (Range) | Dimming (Range) |
|---------|-----------------|---------------|--------------|---------|-------------------------------|----------------|----------------|----------------------|------------------------|-----------------|
| | | | | | | | | | | |

Transformer

CONTROL ▾ **MAX LOAD (W)** ▾

Clear Filters

| Control | Max Load (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | Output Current | Circuit Breaker | Min Load (W) |
|----------|--------------|---------------|--------------|---------|-------------------------------|----------------|-----------------|--------------|
| NON | 20 | | | | | | | |
| NON | 10 | | | | | | | |
| NON | 75 | | | | | | | |
| ELV, NON | 60 | | | 95 | | | | |

Finishes

STAINLESS STEEL FINISHES



PREMIUM FINISHES




STANDARD FINISHES



RAL COLORS



Options





Accessory

Mountings

Mountings With A Power Supply

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com