
**Project** Type Date ARTI STAR - Wall Mount - Line Voltage Driver - Lamp MR16 Gu10 - Aluminum - Surface Mount -Cap C - Height: 12"

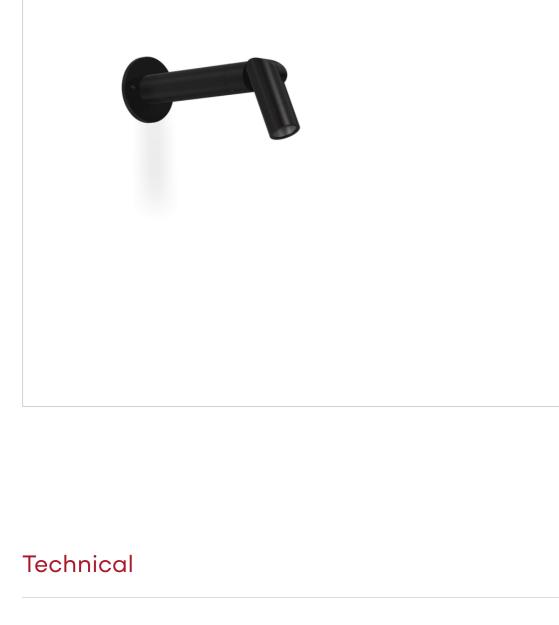

OPTIC -

CRI

INPUT POWER (W) -

Voltage

MAX LOAD (W) -

Input Voltage

95

CCT

CCT CRI 🔻

Input

Power

(W)

Power

**Factor** 

LIGHT SOURCE -

Optic

Input Power Input

Max Load (W)

20

10

75

**Clear Filters** 

Light

Source

**Drivers** 

CONTROL -

(W)

Transformer

CONTROL -

**Clear Filters** 

**Control** 

NON

NON

NON

ELV, NON 60

**Finishes** 

**Options** 

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

**Clear Filters** 

**Control** 



| Technical         |   |  |  |  |
|-------------------|---|--|--|--|
| Delivered Lumens: | - |  |  |  |
|                   |   |  |  |  |

**Delivered** 

THD

(%)

Lumens (Lm)

**Light Source** 

INPUT POWER (W) -

**Operation Ambient** 

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

**Output Power** 

(Max-W)

(Hours)

L90B10

(Hours)

**Output Voltage** 

(Range)

Output Current Circuit Breaker

Diagram

CONE

Dimming

Min Load (W)

Updated 05/30/2024

(Range)

**IES** 

File