


DENALI - Pole Top - Line Voltage Driver - LED COB - Aluminum - Cap C - 4 Fixtures @ 90°

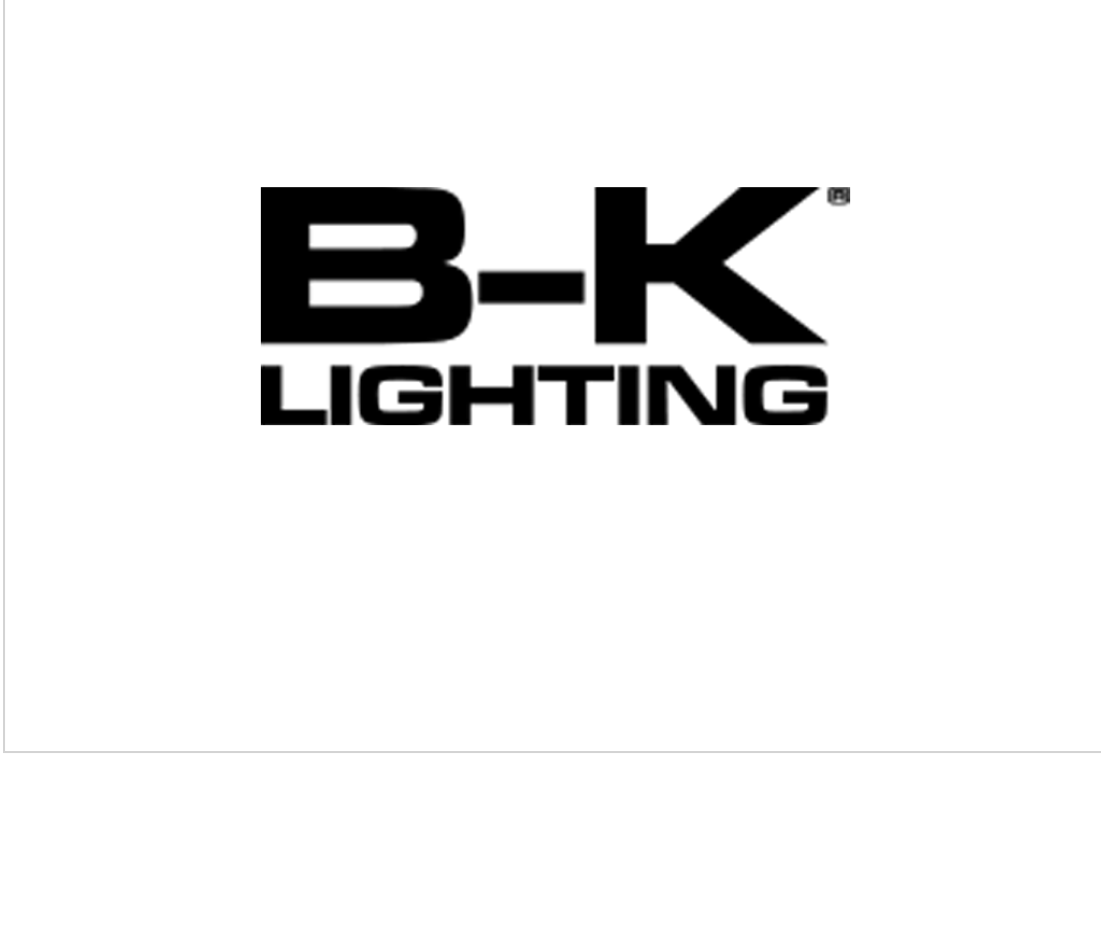

Technical

CCT(K): 2700, 3000, 4000, 3500
 CRI: Ra > 80, R9 > 15, Ra > 90, R9 > 50, Ra > 80, R9 > 15
 Delivered Lumens: -
 Input voltage: 120V, 120-277V

Light Source

LIGHT SOURCE ▾ OPTIC ▾ CCT CRI ▾ INPUT POWER (W) ▾

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
--------------	-------	---------	-----	-----------------	-----------------------	------	-------------------------	------------------------	-------------	----------------	----------	--------------

Drivers

CONTROL ▾ INPUT POWER (W) ▾

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

Transformer


CONTROL ▾ MAX LOAD (W) ▾

Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

Finishes

STANDARD FINISHES

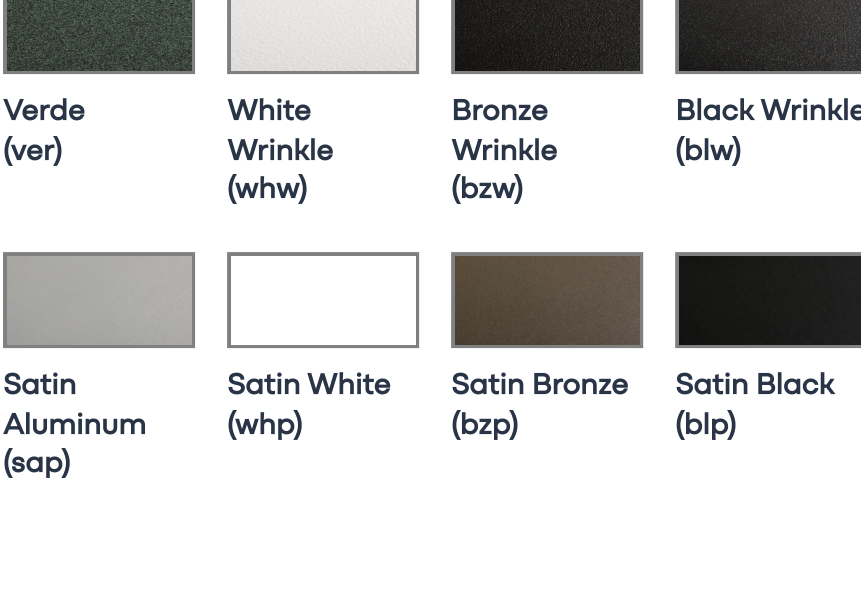


PREMIUM FINISHES



RAL COLORS



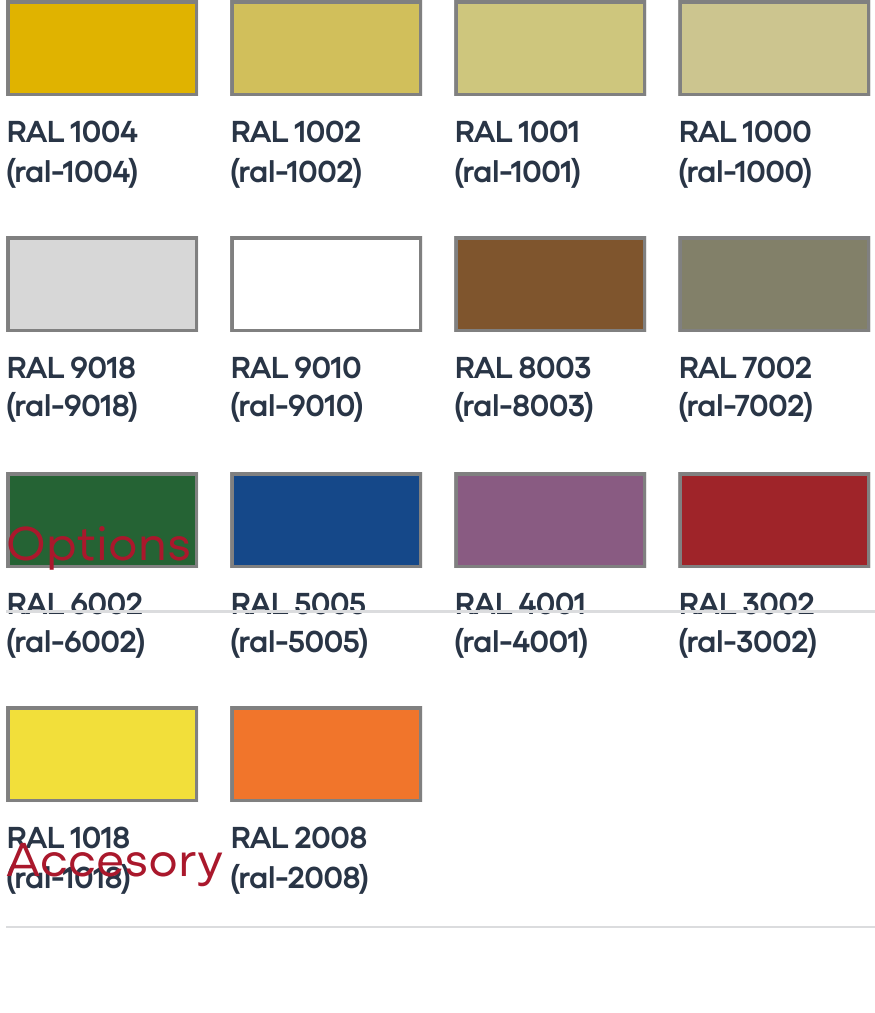

Mountings

Mountings With A Power Supply