
Project Date Type DENALI - Wall Mount - Remote Driver - LED COB -Aluminum - Canopy BC14 - Cap E - Style L - Single - Stem Length: 30"

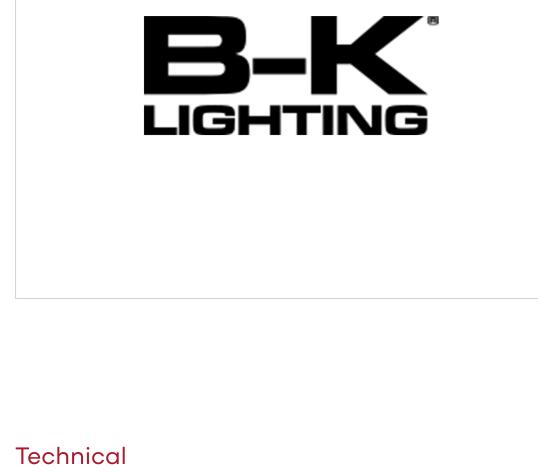

120V, 120-277V

CCT CRI 🔻

Delivered

THD

(%)

Power Factor

Power

Factor

Lumens (Lm)

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

THD (%) Operation Ambient Temperature

Current

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

IES

File

Diagram

CONE

Dimming

(Range)

Min Load (W)

Updated 05/31/2024



Light Source

Delivered Lumens:

Input voltage:

LIGHT SOURCE -OPTIC -**Clear Filters**

Light

Input CCT Optic CRI Power Source (W)

(°)

Drivers

CONTROL -INPUT POWER (W) -

Clear Filters Input Power Input **Control** (W)

Transformer

Voltage

MAX LOAD (W) -

Input Voltage

Control Max Load (W)

Finishes

Options

Accesory

Mountings

Clear Filters

CONTROL ▼

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to