

MINI MICRO ILUME - Wall Recessed - Low Voltage Driver - LED High-Power - Brass - Core Drill - Style A - 4 Optical Openings - Faceplate Flush Mount



Technical

CCT(K):	2700, 3000, 4000, 1500, 3500
CRI:	Ra > 80, R9 > 15, -, Ra > 90, R9 > 50, Ra > 80, R9 > 15
Delivered Lumens:	-
Control:	Non Dimming
Wiring length:	Standard, 25 Ft Leads
Input voltage:	120V, 120-277V

Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCEP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
e70	(°)	2700	Ra > 80, R9 > 15				2					
e71	(°)	3000	Ra > 80, R9 > 15				2					
e72	(°)	4000	Ra > 80, R9 > 15				2					
e73	(°)	1500	-				2					
e85	(°)	2700	Ra > 90, R9 > 50				2					
e86	(°)	3000	Ra > 90, R9 > 50				2					
e87	(°)	3500	Ra > 80, R9 > 15				2					

Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
NON	20									
NON	10									


Transformer

Clear Filters


Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
NON	20							
NON	10							

Finishes

STANDARD FINISHES

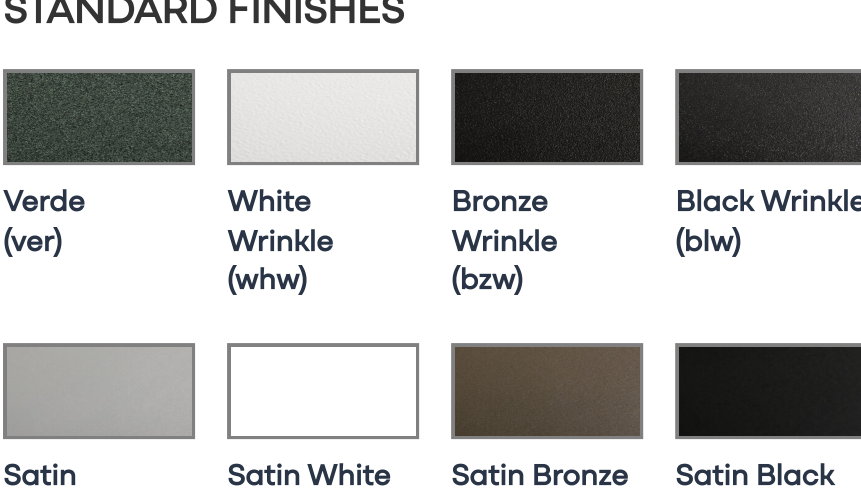

BRASS FINISHES

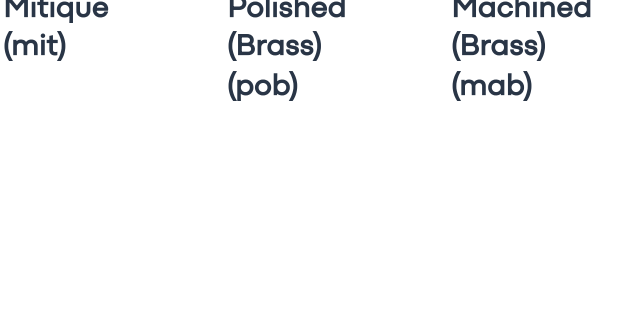


PREMIUM FINISHES



RAL COLORS



Options



Accessory

Mountings

Mountings With A Power Supply

