


MINI MICRO - Ceiling Mount - Low Voltage Driver - LED High-Power - Brass - Stem Mount - Cap E - Stem Length: 36"

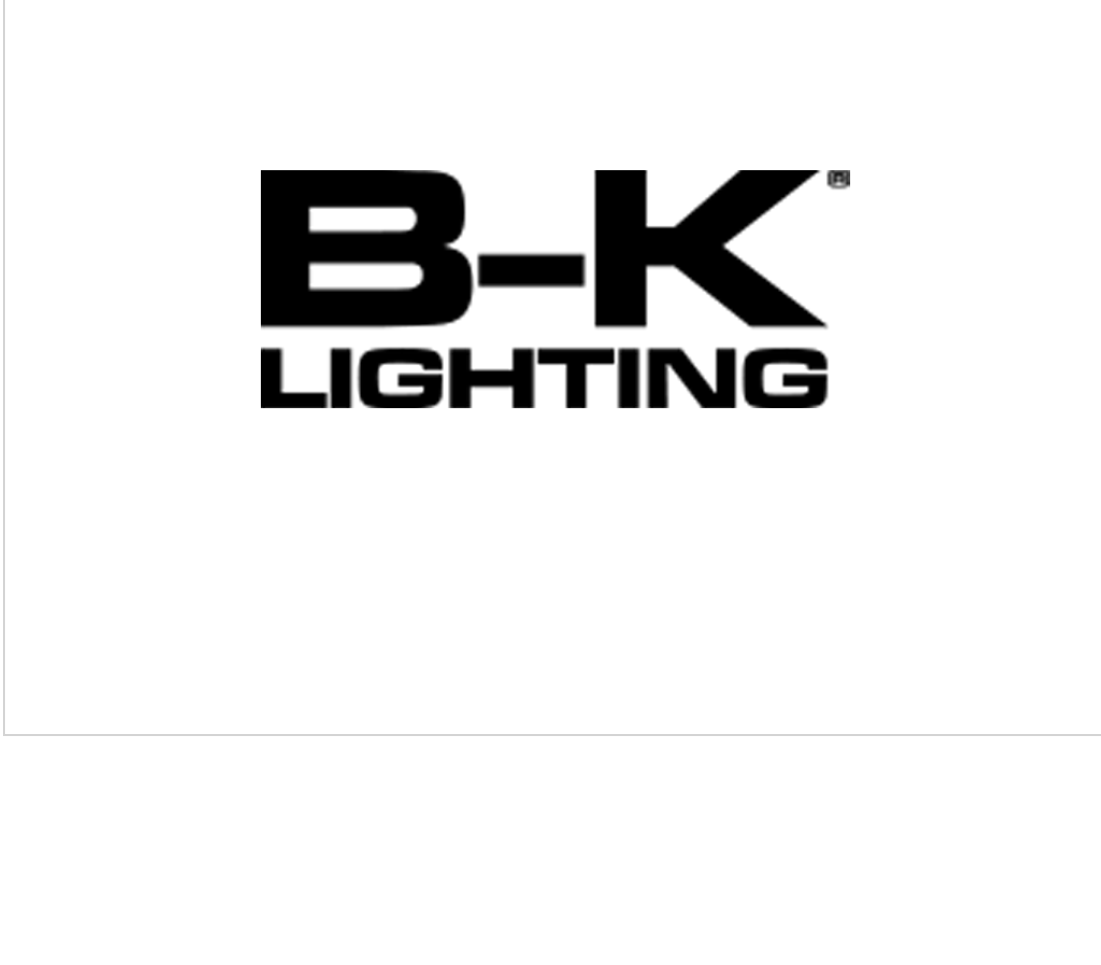

Technical

Delivered Lumens: -
Input voltage: 120V, 120-277V

Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipse (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
--------------	-------	---------	-----	-----------------	-----------------------	------	------------------------	------------------------	-------------	----------------	----------	--------------

Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

Transformer

Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

NON 20

NON 10

Finishes

STANDARD FINISHES




BRASS FINISHES




PREMIUM FINISHES



RAL COLORS

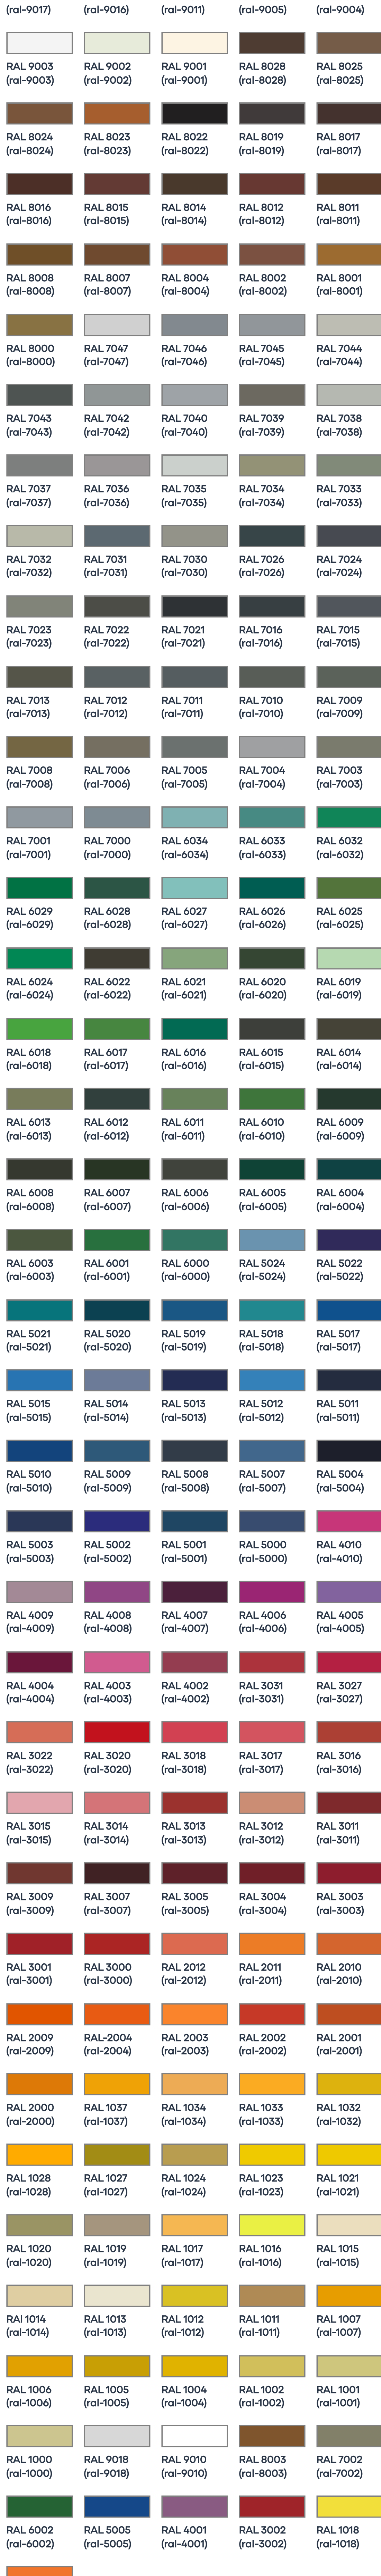

Options

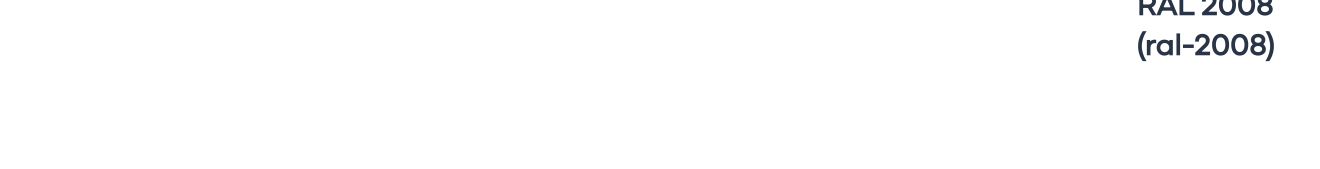

Accessory

Mountings

Mountings With A Power Supply