
Project Date Type NITE STAR - Ceiling Mount - Low Voltage Driver - LED High-Power - Aluminum - Round - Stem Mount

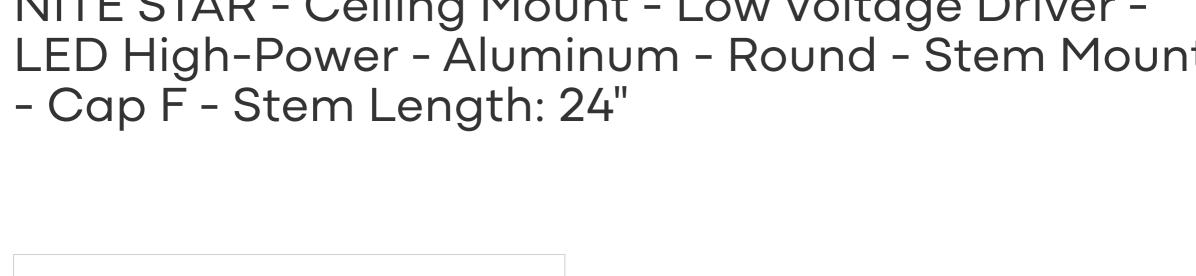

INPUT POWER (W) -

Operation Ambient

Temperature


CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

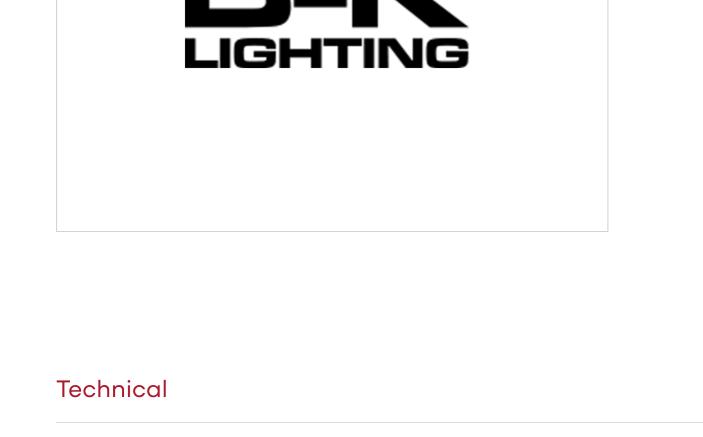

CCT CRI 🔻

Delivered

THD

(%)

95

95

Power

Factor

Lumens (Lm)

120V, 120-277V



Light Source

Delivered Lumens:

Input voltage:

LIGHT SOURCE -OPTIC -

Clear Filters

Source

Input Light Optic CRI Power (W)

Drivers

INPUT POWER (W) -

Clear Filters Input Power Input **Control** (W)

Transformer

CONTROL -

Voltage

MAX LOAD (W) -

CONTROL -**Clear Filters**

NON

NON

NON

Max Load (W) **Control** Input Voltage

ELV, NON 60 75

Finishes

20

10

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Accesory

Mountings

Options

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Output Voltage

(Range)

L90B10

(Hours)

IES

File

Diagram

CONE

Dimming

(Range)

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

Power Factor THD (%) Operation Ambient Temperature Output Current Circuit Breaker Min Load (W)

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/30/2024