
NITE STAR - Wall Mount - Line Voltage Via
Transformer - Lamp MR16 Gu5.3 - Aluminum Round - Power Canopy PC1 - Cap A - Style C - 2
Fixtures - Stem Length: 18"



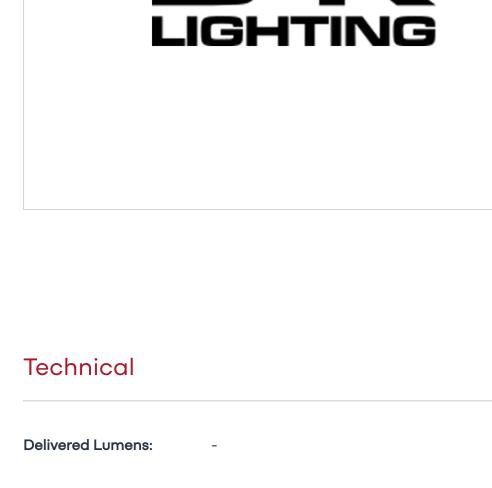

Diagram

CONE

Dimming (Range)

Min Load (W)

Updated 05/30/2024

Delivered Lumens:							
	-						
Light Source	:						
LIGHT SOURCE ~	OPTIC -	CCT CRI -	INPUT POWER (W)				
Clear Filters							
Light Optic Source	CCT (K)	Power		MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 II (Hours) F
Drivers							
CONTROL -	INPUT POWER (	W) •					
Clear Filters							
Control Input Powe		Power THD	Operation Ambient	InRush	Output	Output Power	Output Voltag
(W)	Voltage	Factor (%)	Temperature	Current	Current	(Max-W)	(Range)
Transformer							
CONTROL -	MAX LOAD (W)	<b>—</b>					
Clear Filters	. ,						
Glodi i iltoro	ad (W) Input \	/oltage Power Fa	ctor THD (%) Ope	ration Ambient Te	mperature	Output Current	Circuit Break
Control Max Lo	(,	•	(,			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
Control Max Lo							
NON 20							
NON 20 NON 10		95					
NON 20 NON 10 ELV, NON 60		95 95					
NON 20 NON 10		95 95					
NON 20 NON 10 ELV, NON 60							
NON 20 NON 10 ELV, NON 60 NON 75							
NON 20 NON 10 ELV, NON 60							

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Mountings With A Power Supply

**Options** 

Accesory

Mountings

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com