**Project** Date Type NITE STAR - Wall Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Round - Power Canopy PC1 - Cap B - Style F - 2 Fixtures -Stem Length: 36"

INPUT POWER (W) -

**Operation Ambient** 

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

Current

**Delivered** 

**THD** 

(%)

95

95

Lumens (Lm)

Operating

Output

Current

Current (mA)

L70

**Output Power** 

(Max-W)

(Hours)


L90B10

(Hours)

**Output Voltage** 

(Range)

**Output Current** Circuit Breaker

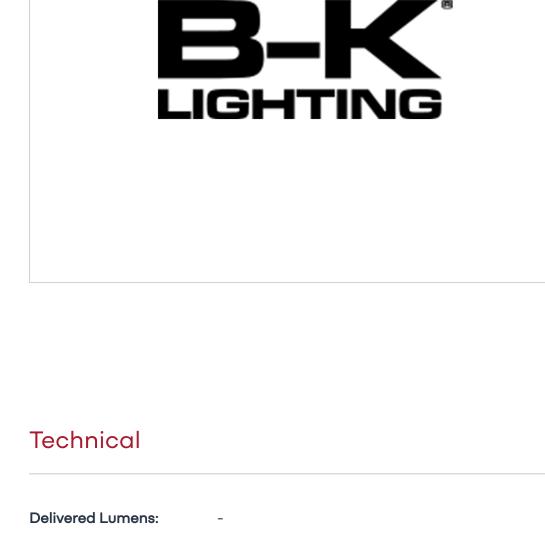



Diagram

CONE

Dimming

Min Load (W)

Updated 05/30/2024

(Range)

**IES** 

File

Input voltage:	120V, 120-277V
Light Source	

LIGHT SOURCE -OPTIC -CCT CRI -

## **Clear Filters** Light

**Clear Filters** 

CONTROL -

**Control** 

NON

NON

ELV, NON

Input CCT Power CRI Optic Source (W)

**Drivers** INPUT POWER (W) -CONTROL -

**Input Power** Input **Power Control** (W) Voltage **Factor** Transformer

**Clear Filters** Input Voltage Power Factor THD (%) Operation Ambient Temperature Max Load (W) 20 10

MAX LOAD (W) -

NON 75 **Finishes** 

60

**Options** Accesory

Mountings With A Power Supply

Mountings

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com