Project Type Date NITE STAR - Wall Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Round - Power Canopy PC1 - Cap C - Style B - Single -Stem Length: 24"

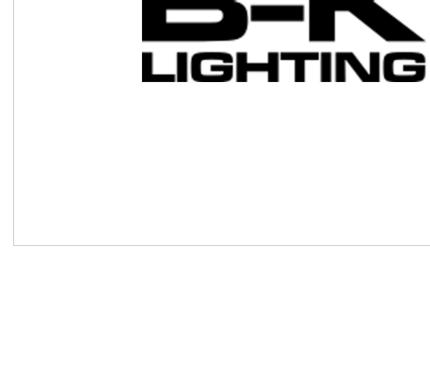




Diagram CONE

Dimming (Range)

Output Current Circuit Breaker Min Load (W)

Technical								
Delivered Lumens:	-	7) /						
Input voltage:	120V, 120-27	/V						
Light Source								
LIGHT SOURCE -	OPTIC -	CCT CRI 🔻	INPUT POWER (W)	▼				
Clear Filters								
Light Optic	CCT CRI	Power	vered CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IE Fi
		(W)						
Drivers								
CONTROL ▼	INPUT POWER (V	<b>V)</b> •						
Clear Filters								
Control Input Power (W)		Power THD Factor (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Vo (Range)	oltag
Transformer								
CONTROL -	MAX LOAD (W)	7						

Max Load (W) Input Voltage Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

95

95

NON 10 ELV, NON 60 NON 75

20

**Clear Filters** 

**Control** 

NON

**Finishes** 

Mountings

**Options** 

Accesory

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

manufacture, use or sell anything it may describe.

Mountings With A Power Supply

Updated 05/30/2024