
Project Type Date NITE STAR - Wall Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Round - Universal Power Module PM1 - Cap D - Style L -Single - Stem Length: 18"



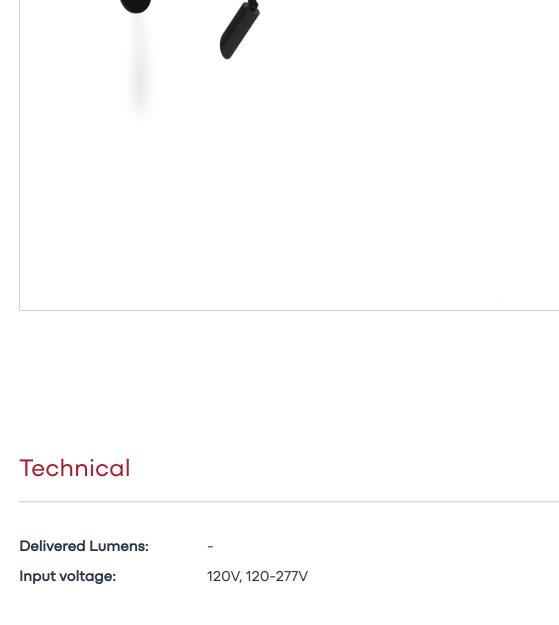

Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

MacAdam

Ellipses (SDCM)

InRush

Current

CBCP

		LIGHII
Technical		
Delivered Lumens:		
Input voltage:	- 120V, 120-277V	
Light Source		
LIGHT SOURCE -	OPTIC V CCT CRI V INPUT POWER (W) →
Clear Filters		

Drivers

CRI

CCT

Optic

Light

Source

INPUT POWER (W) -CONTROL -

Input

Power

(W)

Delivered

Lumens (Lm)

Clear Filters Input Power THD Operation Ambient Input **Power Control** Voltage (%) (W) **Temperature Factor**

Transformer

MAX LOAD (W) -CONTROL -

Clear Filters Max Load (W) Input Voltage Power Factor THD (%) Operation Ambient Temperature **Control** NON 20 NON 10 ELV, NON 95 60 NON 75 95

Finishes Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/30/2024