

# NITE STAR - Wall Mount - Low Voltage Driver - Lamp MR16 Gu5.3 - Brass - Round - Canopy BC6 - Cap F - Dual - Downlight And Uplight



## Technical

Delivered Lumens: -

## Light Source

Clear Filters

| Light Source | Optic | CCT (K) | CRI | Input Power (W) | Delivered Lumens (Lm) | CBCP | MacAdam Ellipses (SDCM) | Operating Current (mA) | L70 (Hours) | L90B10 (Hours) | IES File | Diagram CONE |
|--------------|-------|---------|-----|-----------------|-----------------------|------|-------------------------|------------------------|-------------|----------------|----------|--------------|
|--------------|-------|---------|-----|-----------------|-----------------------|------|-------------------------|------------------------|-------------|----------------|----------|--------------|

## Drivers

Clear Filters

| Control | Input Power (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | InRush Current | Output Current | Output Power (Max-W) | Output Voltage (Range) | Dimming (Range) |
|---------|-----------------|---------------|--------------|---------|-------------------------------|----------------|----------------|----------------------|------------------------|-----------------|
|---------|-----------------|---------------|--------------|---------|-------------------------------|----------------|----------------|----------------------|------------------------|-----------------|


## Transformer

Clear Filters

| Control  | Max Load (W) | Input Voltage | Power Factor | THD (%) | Operation Ambient Temperature | Output Current | Circuit Breaker | Min Load (W) |
|----------|--------------|---------------|--------------|---------|-------------------------------|----------------|-----------------|--------------|
| NON      | 20           |               |              |         |                               |                |                 |              |
| NON      | 10           |               |              |         |                               |                |                 |              |
| ELV, NON | 60           |               | 95           |         | 1000                          |                | 1000            | 1000         |
| NON      | 75           |               | 95           |         | 1000                          |                | 1000            | 1000         |

## Finishes

### STANDARD FINISHES

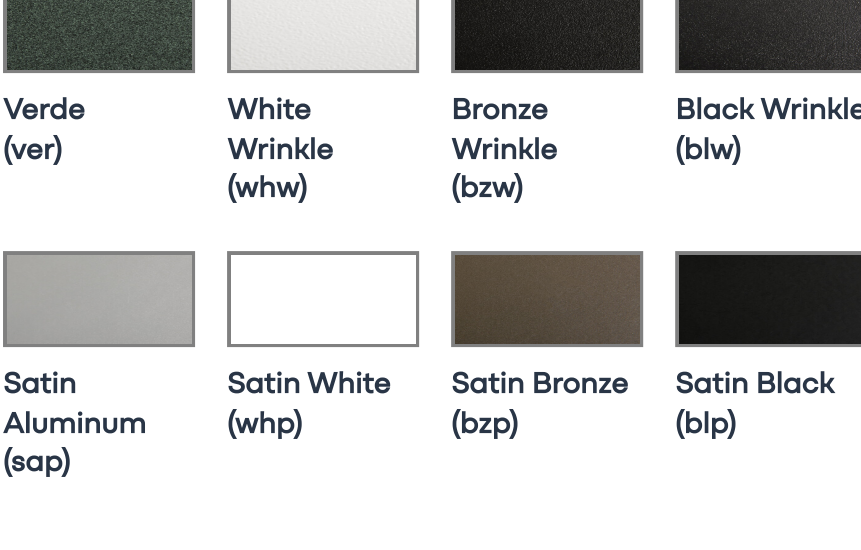


### PREMIUM FINISHES



### BRASS FINISHES



### RAL COLORS

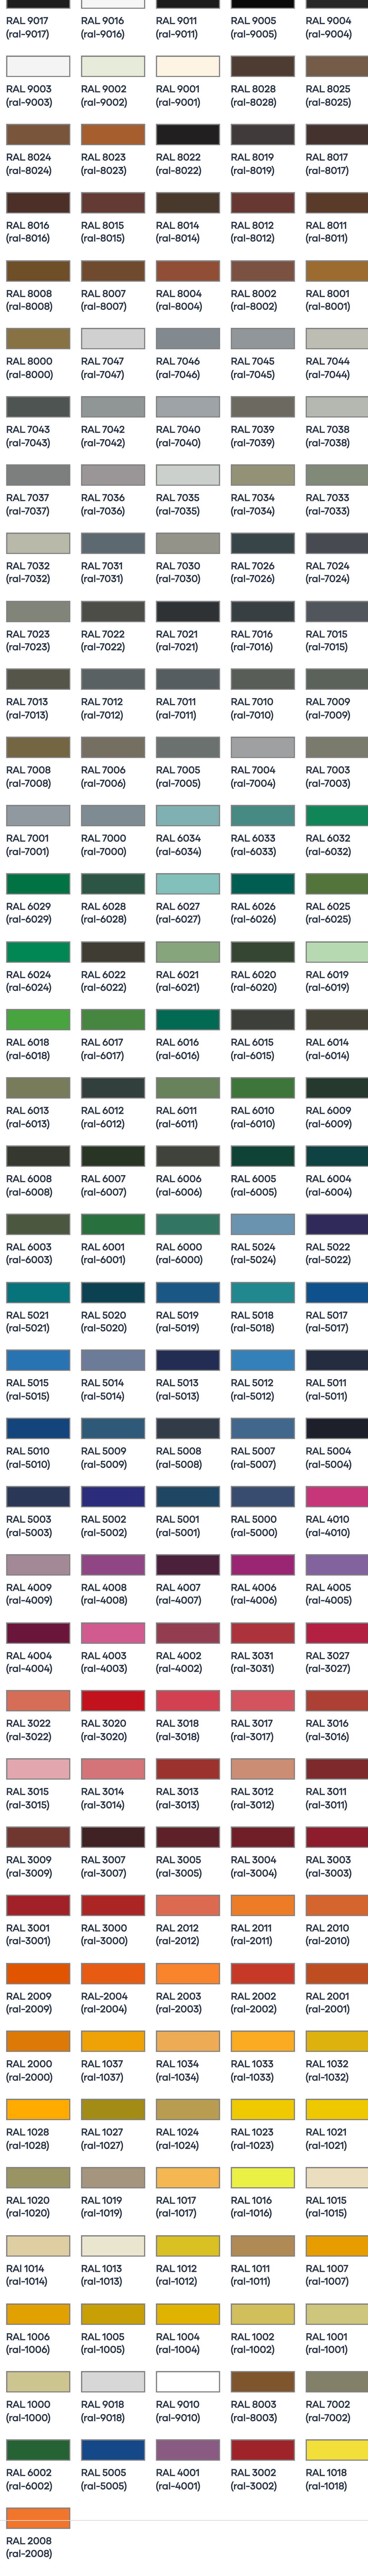

## Options

RAL 2008 (ral-2008)

## Accessory

## Mountings

## Mountings With A Power Supply