
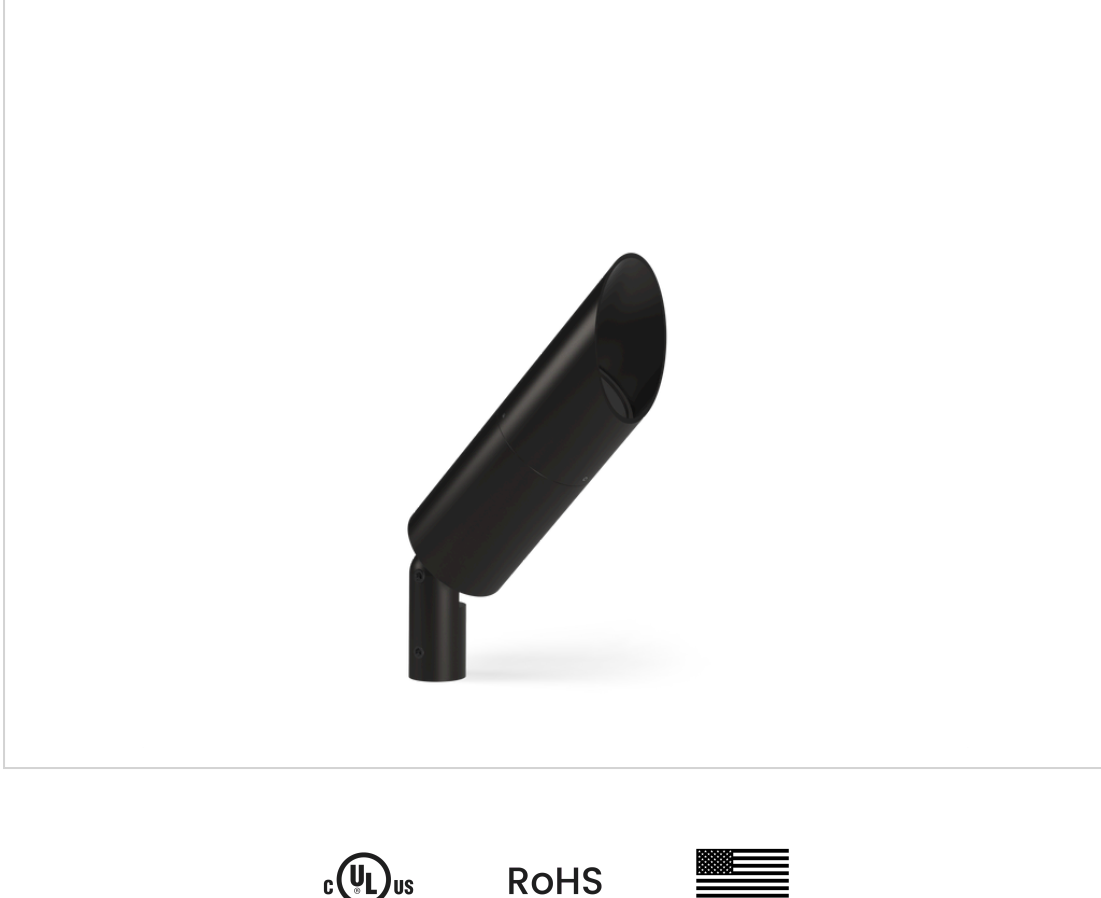


# DENALI - Floodlight - Line Voltage Driver - LED COB - Aluminum - Cap D

RoHS



## Technical

<b>CCT(K):</b>	2700, 3000, 4000, 3500	<b>Certification:</b>	UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards, RoHS compliant components.
<b>CRI:</b>	Ra > 80, R9 > 15, Ra > 90, R9 > 50, Ra > 80, R9 > 15		
<b>Input Power:</b>	13, 21		
<b>Beam Angle:</b>	17, 45, 55		
<b>Delivered Lumens:</b>	574 - 1634		
<b>Control:</b>	Non Dimming, ELV Dimming (For use with Electronic Low Voltage Dimmer), 0-10V		
<b>Lens:</b>	Clear (Standard), Soft Focus, Rectilinear		
<b>Shielding:</b>	Not included (Standard), Honeycomb Baffle		
<b>Wiring length:</b>	5 Ft Leads, 25 Ft Leads		
<b>Weight:</b>	2.96		
<b>Source to lens distance:</b>	1.45		
<b>Input voltage:</b>	120-277V, 120V		
<b>IP Rating:</b>	IP66		

## Configure


DATE PROJECT TYPE 

This is a remote driver product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote driver separately.

## Light Source





Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
x98	Flood (45°)	2700	Ra > 80, R9 > 15	13	1041	1773	2	440	50000			
x98	Spot (17°)	2700	Ra > 80, R9 > 15	13	829	6480	2	440	50000			
x98	Wide Flood (55°)	2700	Ra > 80, R9 > 15	13	1180	1478	2	440	50000			
x99	Flood (45°)	3000	Ra > 80, R9 > 15	13	1091	1860	2	440	50000			
x99	Spot (17°)	3000	Ra > 80, R9 > 15	13	869	6796	2	440	50000			
x99	Wide Flood (55°)	3000	Ra > 80, R9 > 15	13	1237	1550	2	440	50000			
x125	Flood (45°)	4000	Ra > 80, R9 > 15	21	1568	2812	2	700	50000			
x125	Spot (17°)	4000	Ra > 80, R9 > 15	21	1394	10431	2	700	50000			
x125	Wide Flood (55°)	4000	Ra > 80, R9 > 15	21	1634	2165	2	700	50000			
x126	Flood (45°)	2700	Ra > 90, R9 > 50	21	920	1650	2	700	50000			
x126	Spot (17°)	2700	Ra > 90, R9 > 50	21	818	6120	2	700	50000			
x126	Wide Flood (55°)	2700	Ra > 90, R9 > 50	21	959	1270	2	700	50000			
x127	Flood (45°)	3000	Ra > 90, R9 > 50	21	1133	2031	2	700	50000			
x127	Spot (17°)	3000	Ra > 90, R9 > 50	21	1007	7535	2	700	50000			
x127	Wide Flood (55°)	3000	Ra > 90, R9 > 50	21	1180	1564	2	700	50000			
x128	Flood (45°)	3500	Ra > 90, R9 > 50	21	813	1457	2	700	50000			
x128	Spot (17°)	3500	Ra > 90, R9 > 50	21	723	5406	2	700	50000			
x128	Wide Flood (55°)	3500	Ra > 90, R9 > 50	21	847	1225	2	700	50000			
x129	Flood (45°)	4000	Ra > 90, R9 > 50	21	1225	2196	2	700	50000			
x129	Spot (17°)	4000	Ra > 90, R9 > 50	21	1089	8148	2	700	50000			
x129	Wide Flood (55°)	4000	Ra > 90, R9 > 50	21	1277	1691	2	700	50000			
x100	Flood (45°)	4000	Ra > 80, R9 > 15	13	1134	1931	2	440	50000			
x100	Spot (17°)	4000	Ra > 80, R9 > 15	13	903	7059	2	440	50000			
x100	Wide Flood (55°)	4000	Ra > 80, R9 > 15	13	1285	1610	2	440	50000			
x101	Flood (45°)	2700	Ra > 90, R9 > 50	13	720	1228	2	440	50000			
x101	Spot (17°)	2700	Ra > 90, R9 > 50	13	574	4486	2	440	50000			
x101	Wide Flood (55°)	2700	Ra > 90, R9 > 50	13	817	1023	2	440	50000			
x102	Flood (45°)	3000	Ra > 90, R9 > 50	13	793	1350	2	440	50000			
x102	Spot (17°)	3000	Ra > 90, R9 > 50	13	631	4936	2	440	50000			
x102	Wide Flood (55°)	3000	Ra > 90, R9 > 50	13	899	1126	2	440	50000			
x103	Flood (45°)	3500	Ra > 80, R9 > 15	13	1074	1829	2	440	50000			
x103	Spot (17°)	3500	Ra > 80, R9 > 15	13	855	6685	2	440	50000			
x103	Wide Flood (55°)	3500	Ra > 80, R9 > 15	13	1217	1525	2	440	50000			
x104	Flood (45°)	3500	Ra > 90, R9 > 50	13	767	1307	2	440	50000			
x104	Spot (17°)	3500	Ra > 90, R9 > 50	13	611	4775	2	440	50000			
x104	Wide Flood (55°)	3500	Ra > 90, R9 > 50	13	869	1089	2	440	50000			
x121	Flood (45°)	4000	Ra > 90, R9 > 50	13	855	1457	2	440	50000			
x121	Spot (17°)	4000	Ra > 90, R9 > 50	13	681	5324	2	440	50000			
x121	Wide Flood (55°)	4000	Ra > 90, R9 > 50	13	969	1214	2	440	50000			
x122	Flood (45°)	2700	Ra > 80, R9 > 15	21	1359	2437	2	700	50000			
x122	Spot (17°)	2700	Ra > 80, R9 > 15	21	1208	9040	2	700	50000			
x122	Wide Flood (55°)	2700	Ra > 80, R9 > 15	21	1416	1876	2	700	50000			
x123	Flood (45°)	3000	Ra > 80, R9 > 15	21	1508	2704	2	700	50000			
x123	Spot (17°)	3000	Ra > 80, R9 > 15	21	1341	10030	2	700	50000			
x123	Wide Flood (55°)	3000	Ra > 80, R9 > 15	21	1571	2082	2	700	50000			
x124	Flood (45°)	3500	Ra > 80, R9 > 15	21	1277	2290	2	700	50000			
x124	Spot (17°)	3500	Ra > 80, R9 > 15	21	1136	8496	2	700	50000			
x124	Wide Flood (55°)	3500	Ra > 80, R9 > 15	21	1331	1763	2	700	50000			

## Drivers



Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

## Transformer



Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

## Finishes


### STANDARD FINISHES



### PREMIUM FINISHES



### RAL COLORS

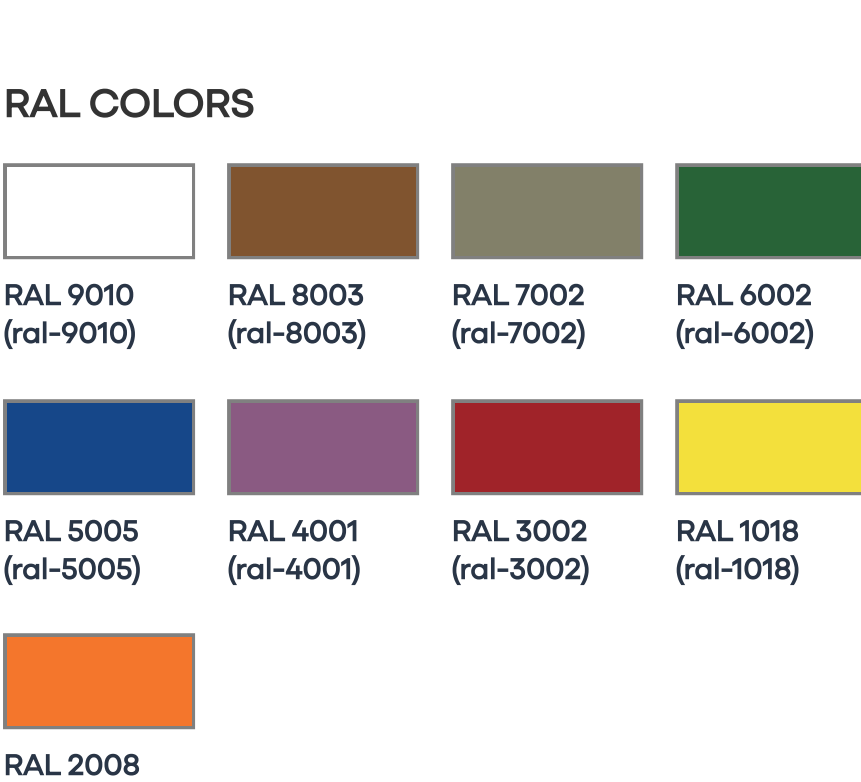

## Options

## Accessory

## Mountings

### Mountings With A Power Supply