
Project Type Date

RIO - Light Pole - Line Voltage Driver - LED High-Power - Aluminum - Square - Square Straight Aluminum Pole 4" - Cap D - 3 Fixtures @ 90° -Height: 10"



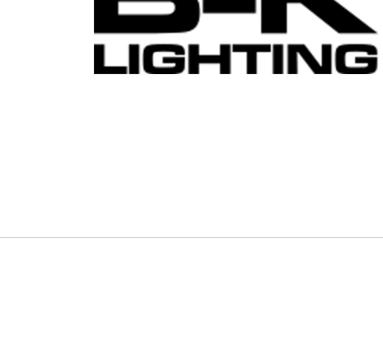

Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

MacAdam

Ellipses (SDCM)

InRush

Current

CBCP

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Temperature

Technical					
Delivered Lumens:	-				
Input voltage:	120V, 120-277	V			
Light Source					
LIGHT SOURCE -	OPTIC -	CCT CRI 🔻	INPUT POWER (W)		

LIGHT SOURCE - OPTIC - CCT CRI -

Light	0	CCT	ODI	ln
Clear Filters	S			

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)

THD

(%)

Factor

Input Voltage

.		

Drivers		

Drivers		

Drivers			

CONTROL -INPUT POWER (W) -**Clear Filters** Input Power Input **Power Control**

Voltage

(W)

Clear Filters

Control Max Load (W)

Transformer MAX LOAD (W) -CONTROL -

Finishes

Options

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/31/2024