
**Project** Type Date

RIO - Light Pole - Line Voltage Driver - LED High-Power - Aluminum - Square - Square Straight Aluminum Pole 4" - Cap D - 3 Fixtures @ 90° -Height: 16"



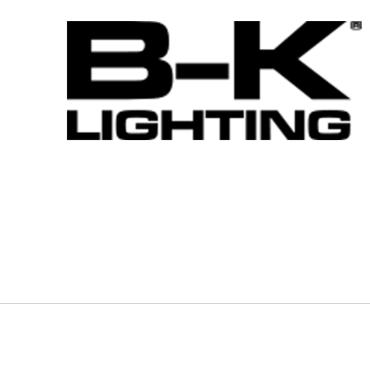

Diagram

CONE

Dimming

Min Load (W)

Updated 05/30/2024

(Range)

**IES** 

File

Technical	
Delivered Lumens:	-
Input voltage:	120V, 120-277V
Light Source	

INPUT POWER (W) -

**Operation Ambient** 

**Temperature** 

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Operating

Output

Current

Current (mA)

L70

**Output Power** 

**Output Current** 

(Max-W)

(Hours)

L90B10

(Hours)

**Output Voltage** 

**Circuit Breaker** 

(Range)

LIGHT SOURCE -**Clear Filters** 

Input Light **Delivered** CCT Power **CBCP** Optic CRI Lumens (Lm) Source (W)

CCT CRI -

THD

(%)

**Power Factor** 

OPTIC -

**Clear Filters** 

Transformer

CONTROL -

**Finishes** 

**Drivers** 

INPUT POWER (W) -CONTROL -

**Input Power** Input **Power Control** (W) Voltage **Factor** 

**Clear Filters** Control Max Load (W) Input Voltage

MAX LOAD (W) -

**Options** 

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to