
Project Type Date

RIO - Light Pole - Line Voltage Driver - LED High-Power - Aluminum - Square - Square Straight Aluminum Pole 4" - Cap D - 3 Fixtures - Spiral -Height: 16"



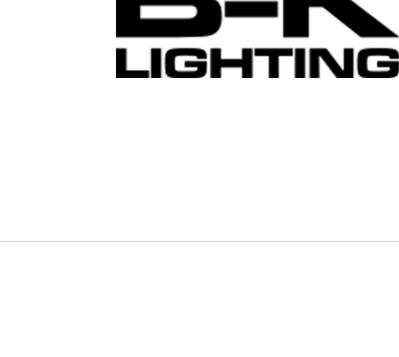

Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

CBCP

Operation Ambient

Temperature

Technical	
Delivered Lumens: Input voltage:	- 120V, 120-277V
pot vertage.	
Light Source	
LIGHT SOURCE _	OPTIC - CCT CPI - INDI IT POWED (W) -

Light Source	Optic	CCT (K)	CRI	Input Power	
Clear Filte	rs				

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)

Drivers		

Drivers		

Input Power

(W)

Transformer

Clear Filters

Finishes

Options

Control

CONTROL ~	INPUT POWER (W)
Clear Filters	

Input

Voltage

THD

(%)

Power Factor

Power

Factor

MAX LOAD (W) -CONTROL -Input Voltage Control Max Load (W)

Accesory

Mountings

manufacture, use or sell anything it may describe.

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/30/2024